
REV.	DATE	DESCRIPTION	BY	APVD

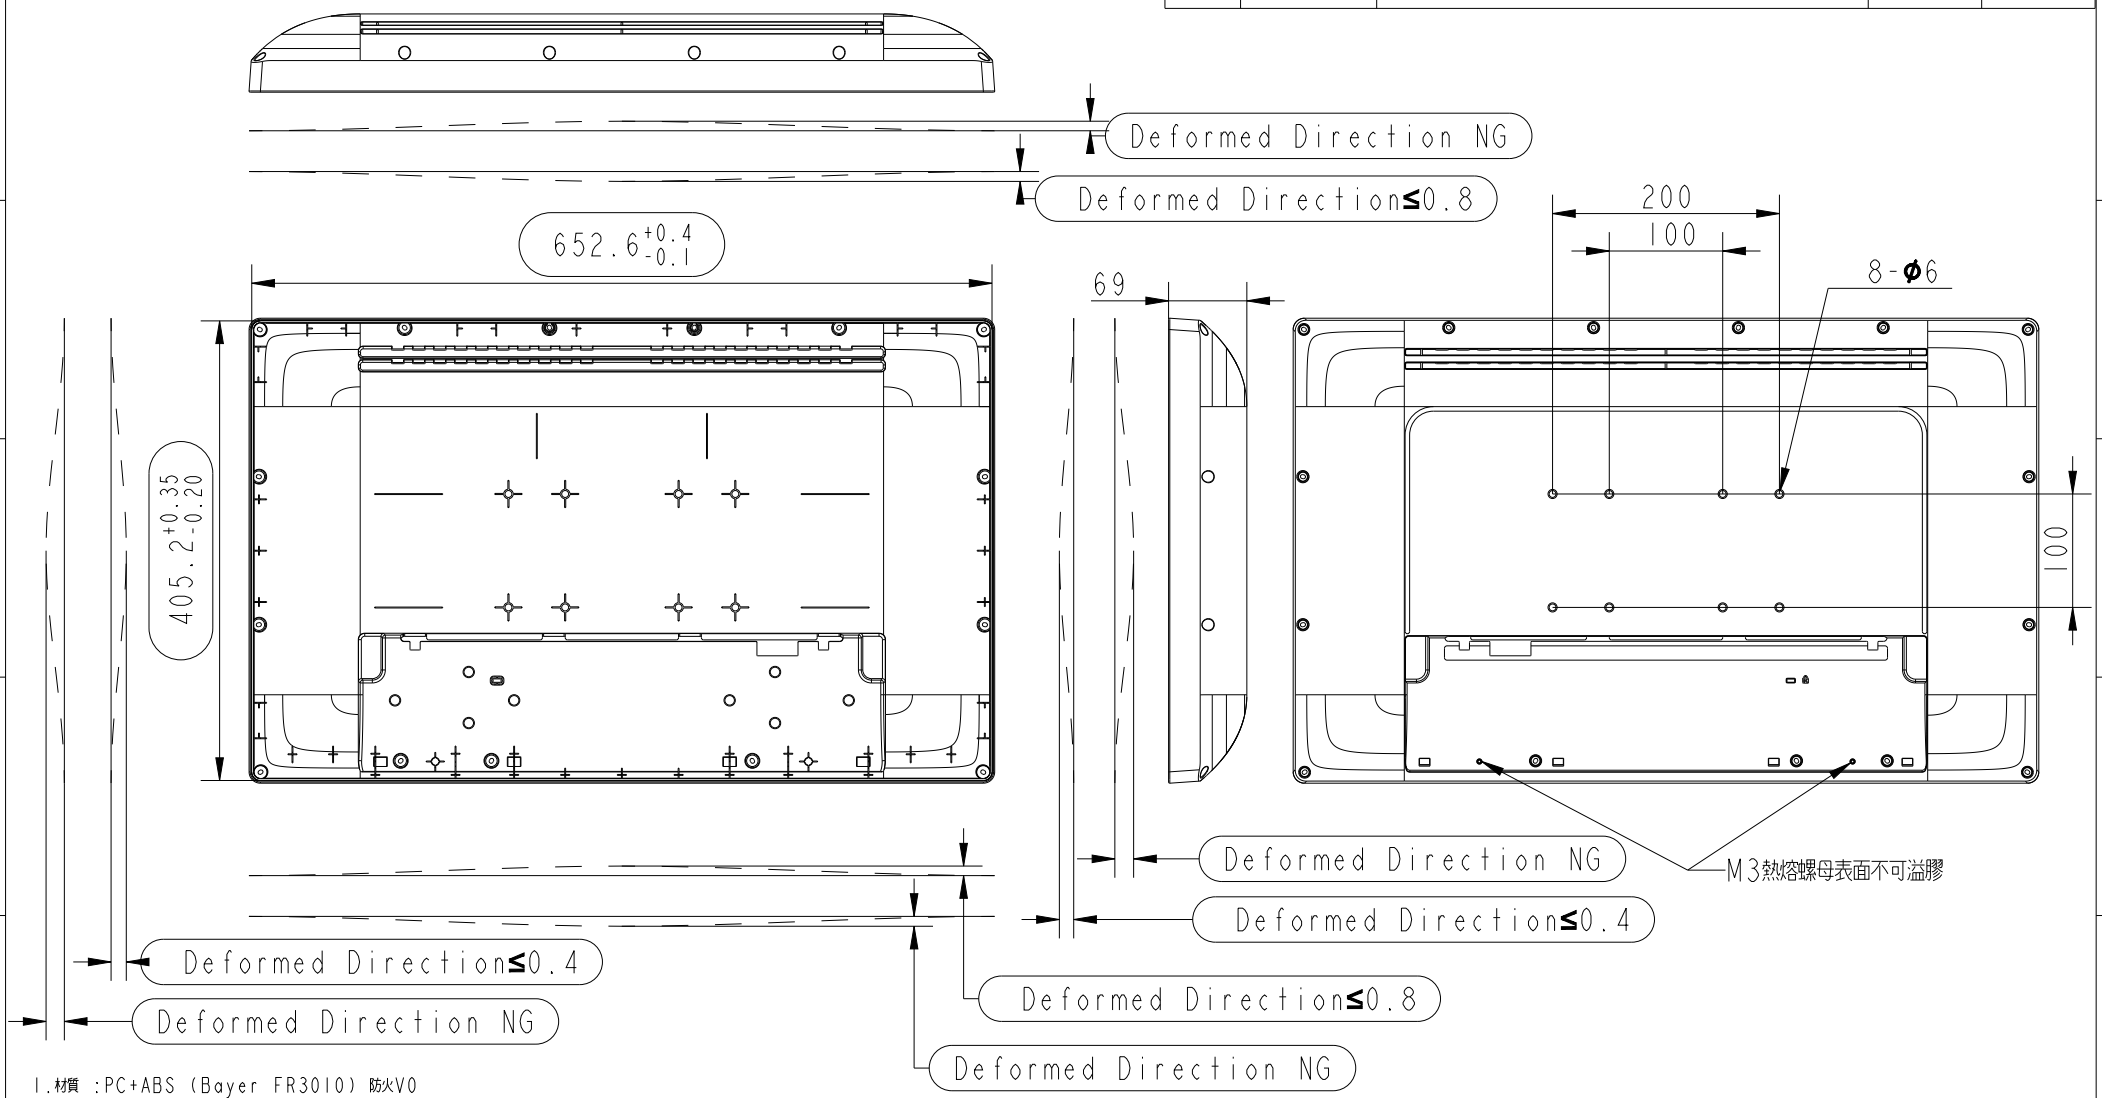


1. 材質 ：PC+ABS (Bayer FR3010) 防火V0
   T=2.5 & 3.5
2. 表面處理 ： 咬花 ， MT-11010
3. 熱熔螺母表面不可油污扭力7kg，拉拔力7kg。
4. 未標註的拔模角以不會拉模角度位主其餘以0.5度製作.
5. 所有外觀面不允許有應力痕，縮水痕，結合痕與刮傷與PL線.
6. 膠口與頂針痕須低於該平面0.05mm.
7. 未標註的倒圓角以自然R角0.2mm製作.
8. 同心度公差爲± 0.05 mm.
9. 標有" O "符號爲重要尺寸.
10. 未標示公差尺寸，請參考一般公差表.
11. 圖面未標示尺寸處，請參考3D圖檔.
12. 所有表面無油污.

RANGE OF DIMENSION	TOLERANCE CLASS DESIGNATION V f	V m	V c
UP TO 30	±0.10	±0.20	±0.50
ABOVE 30~120	±0.15	±0.30	±0.80
ABOVE 120~315	±0.20	±0.50	±1.20
ABOVE 315~1000	±0.30	±0.80	±2.00
ANGLE ±1° (±1.75/100)			

THIRD ANGLE PROJECTION

UNITS:mm	SCALE: 1/1	SHEET: 1 OF 2	MODEL NO.:		
MATERIAL:		TREATMENT:			
DSGD by	KimHuang	2023/03/23	PART NAME: REAR COVER (PC270434R(RGD2773AM11-P))		
CHK by					
APVD by			PART NO.: 3MD622P1010	REV.	
APVD NO.:		3D FILE NAME: REAR_COVER_3MD622P1010	DIVA Laboratories ,Ltd.		

REV.	DATE	DESCRIPTION	BY	APVD

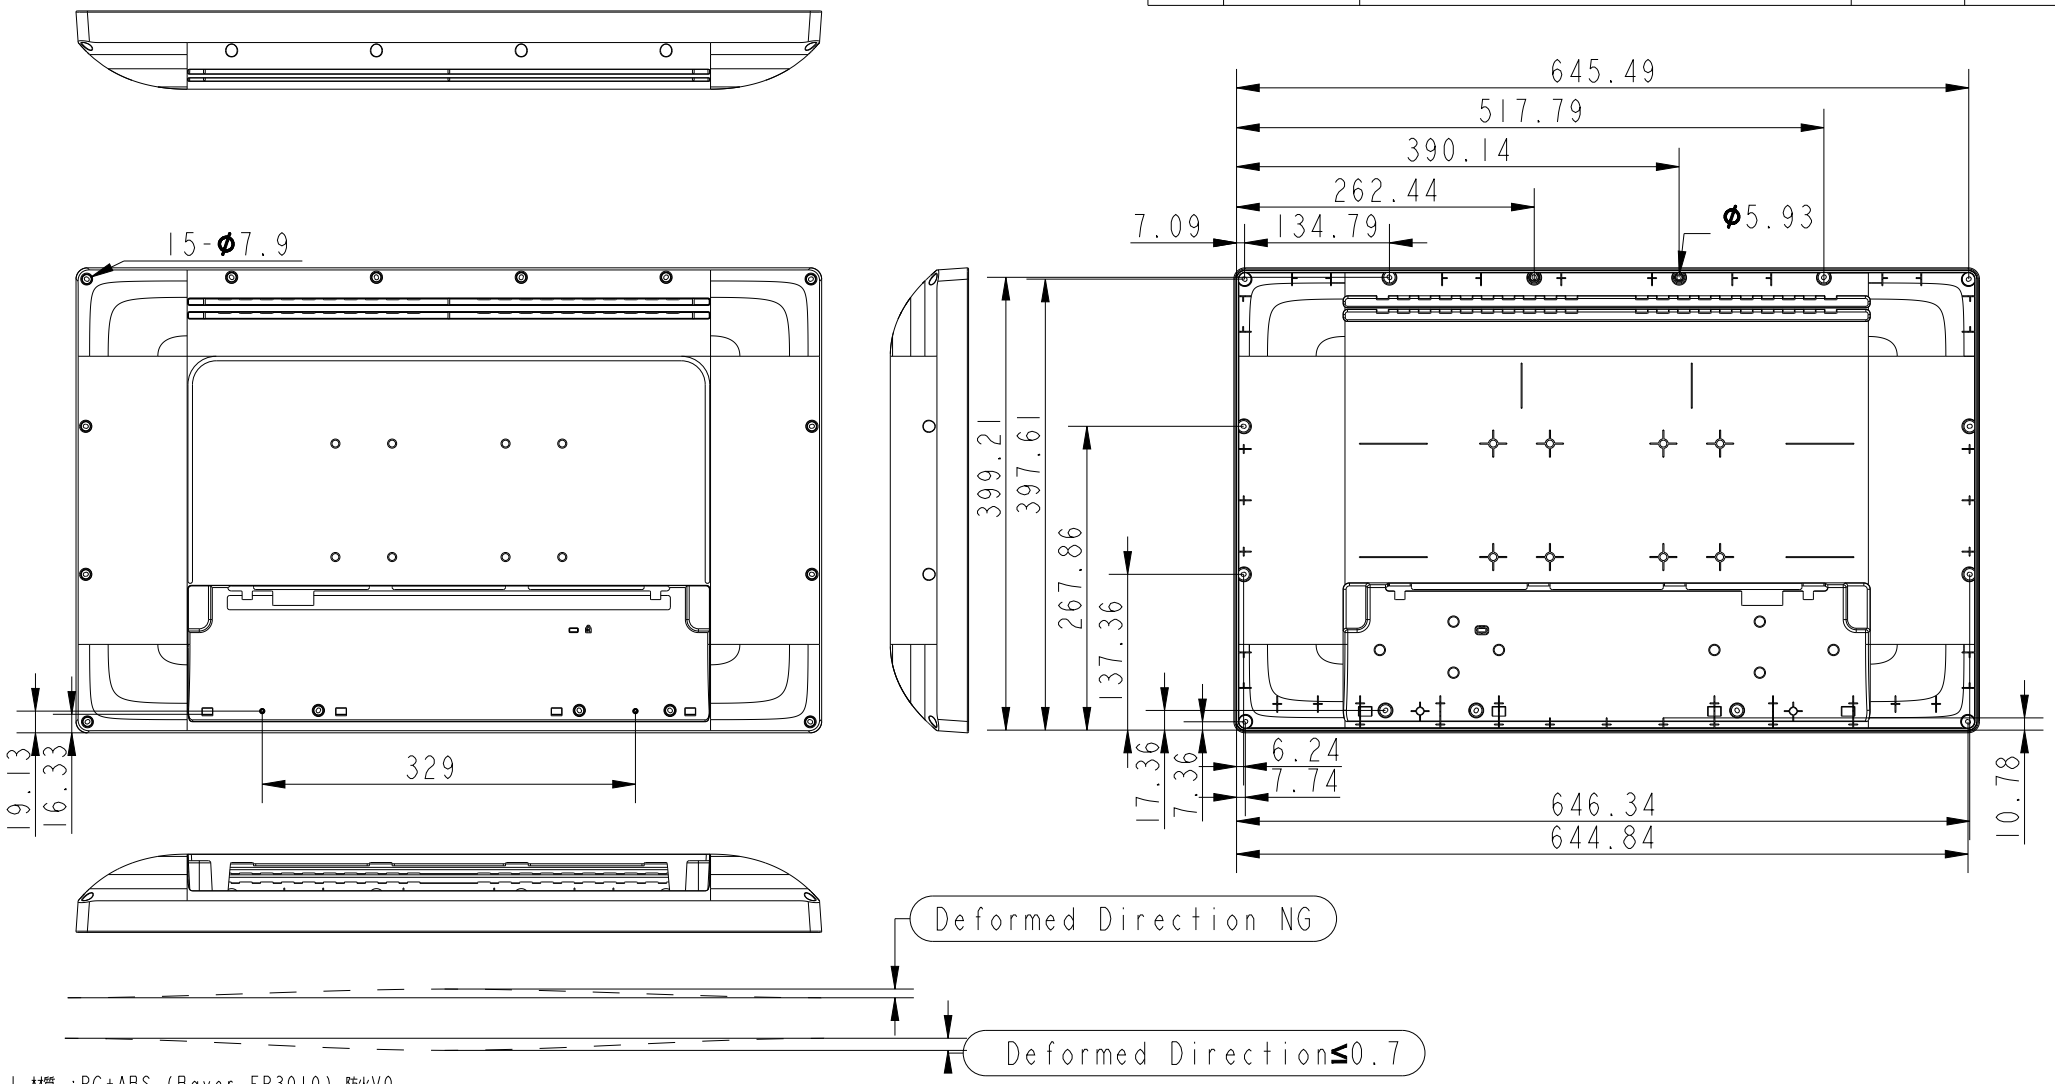

1. 材質 ：PC+ABS (Bayer FR3010) 防火V0
   T=2.5 & 3.5
2. 表面處理 ： 咬花 ， MT-11010
3. 熱熔螺母表面不可油污扭力7kg，拉拔力7kg。
4. 未標註的拔模角以不會拉模角度位主其餘以0.5度製作.
5. 所有外觀面不允許有應力痕，縮水痕，結合痕與刮傷與PL線.
6. 膠口與頂針痕須低於該平面0.05mm.
7. 未標註的倒圓角以自然R角0.2mm製作.
8. 同心度公差爲± 0.05 mm.
9. 標有" O "符號爲重要尺寸.
10. 未標示公差尺寸，請參考一般公差表.
11. 圖面未標示尺寸處，請參考3D圖檔.
12. 所有表面無油污.

RANGE OF DIMENSION	TOLERANCE CLASS DESIGNATION f	V m	V c
UP TO 30	±0.10	±0.20	±0.50
ABOVE 30~120	±0.15	±0.30	±0.80
ABOVE 120~315	±0.20	±0.50	±1.20
ABOVE 315~1000	±0.30	±0.80	±2.00
ANGLE ±1° (±1.75/100)			

THIRD ANGLE PROJECTION

UNITS:mm	SCALE: 1/1	SHEET: 2 OF 2	MODEL NO.:		
MATERIAL:		TREATMENT:			
DSGD by	KimHuang	2023/03/23	PART NAME: REAR COVER (PC270434R(RGD2773AM11-P))		
CHK by					
APVD by			PART NO.: 3MD622P1010	REV.	
APVD NO.:		3D FILE NAME: REAR_COVER_3MD622P1010	DIVA Laboratories ,Ltd.		