


REV.	DATE	DESCRIPTION	BY	APVD
IPI	2023-08-25	IPI RELEASE	Laslie	-

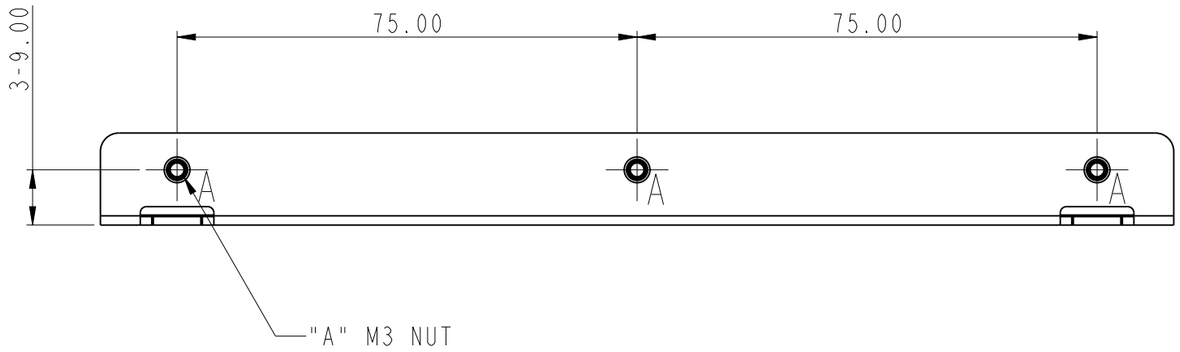

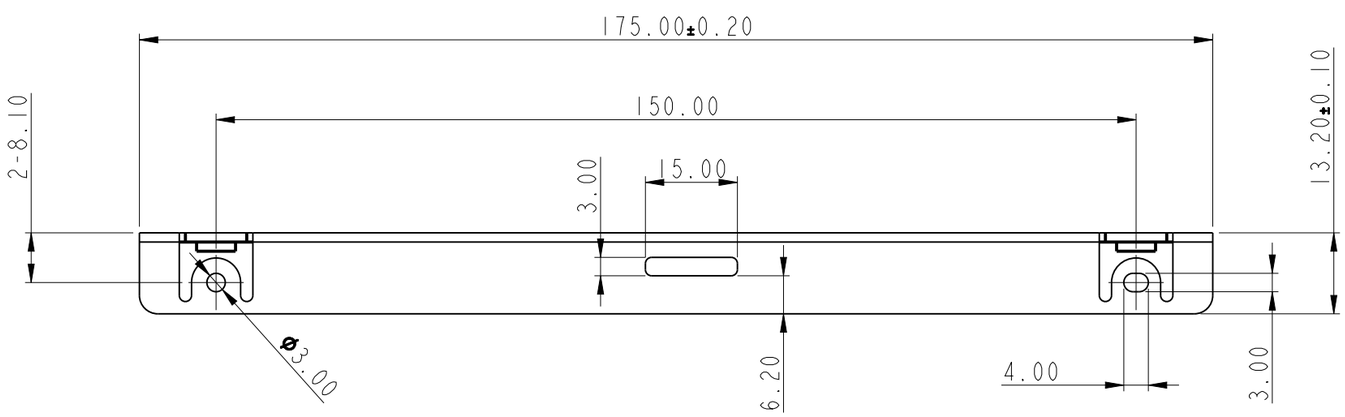

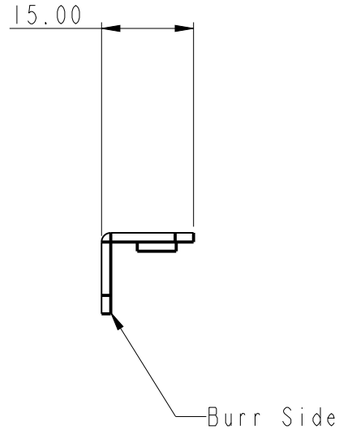

NOTE:
1. Material: AL5052P-32, t=1.5
2. Finish: Chromate Passivation Caoting.
3. Deformation and flatness <0.3 mm.
4. Burrs & sharp edge(s) allowed in 0.1 mm MAX..
   based on the principle of not hurtting hands.
5. Torque strength of Stand-off / NUT : >=12 kgf/cm.
6. ◯ Inspection dimension.
7. Unspecified Dimension refer to CAD Drawing file.
8. RoHS Compliant.

RANGE OF DIMENSION	TOLERANCE CLASS DESIGNATION f	V m	c
UP TO 30	±0.10	±0.20	±0.50
ABOVE 30~120	±0.15	±0.30	±0.80
ABOVE 120~315	±0.20	±0.50	±1.20
ABOVE 315~1000	±0.30	±0.80	±2.00
ANGLE ±1° (±1.75/100)			

THIRD ANGLE PROJECTION

DSGD by	Laslie	2023-08-25	
CHK by	-	-	
APVD by	-	-	
APVD NO.:		3D FILE NAME: 0238_216_PANEL_BRACKET	

UNITS:mm	SCALE: 1/1	SHEET: 1 OF 1	MODEL NO.: Shelby 23.8
MATERIAL: AL 5052	TREATMENT:		

PART NAME: PANEL BRACKET

PART NO.: 3MD628M3010 REV. 0

DMA Laboratories ,Ltd.