



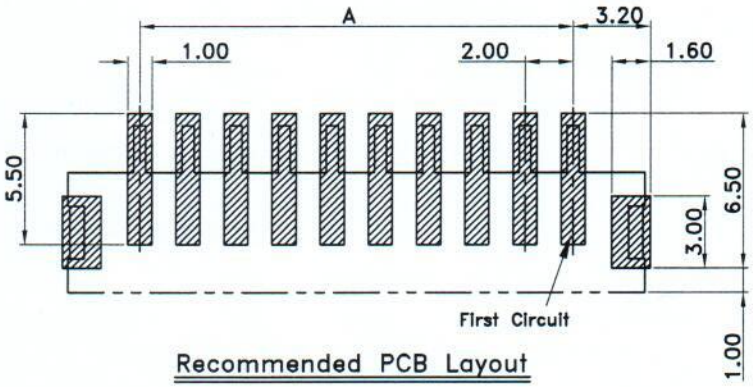


Recommended PCB Layout

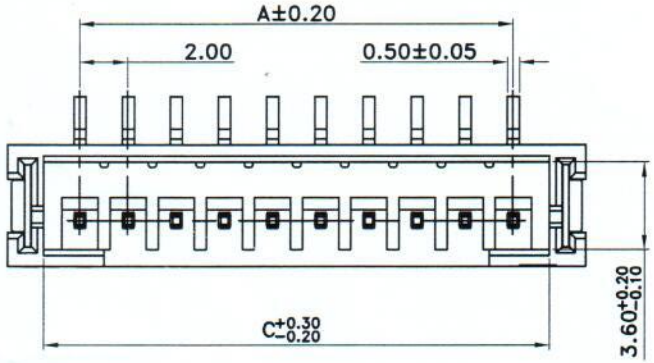


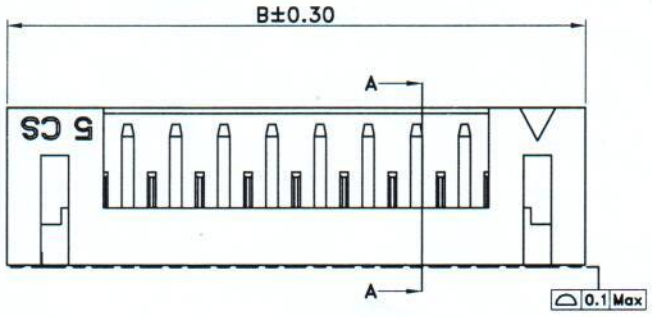

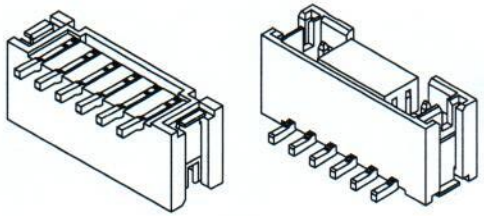





Cap Dimension:




Poles	D
02~03	4.50
04~16	6.50







A-A Section



Assembly Dim.

■SPECIFICATIONS
- Rating Voltage : 100V AC/DC
- Current Rating : 2A AC/DC
- Withstanding Voltage : 800V AC/minute
- Insulation Resistance : 1,000MΩ min
- Temperature Range : - 40℃ to + 105℃
- Contact Resistance : 20mΩ max

■ WAFER
- Part No. : JS-1261-XX XX XX(XX)XX
  Product Code: ① ② ③ ④ ⑤
  ① Poles : 02~16
  ② CAP: Blank : With Cap
  NC: Non Cap
  ③ Halogen : Blank:W/ Halogen （Color Nature）
  HF : No Halogen （Color Black）
  ④ Plated : Blank:Bright-Tin Plated
  NM:Matte-Tin Plated
  G: Gold, Gold flash
  SG:Selective Gold, Gold flash
  ⑤ Packing:Blank:Paper Reel; Q'ty800Pcs/Reel(With Cap)
  /A :/Tube;Refer to the packing specification(With Cap)
  /P:15" Plastic Reel; Q'ty1000Pcs /Reel(With Cap)
  /P1:13" Plastic Reel;Q'ty750Pcs /Reel(With Cap)
- Material :
  1. Contact : Phos. Bronze
  2. Nail : Brass
  3. Base : W/Halogen: Nylon 9T UL94V-0 （Color Nature）, No Halogen: Nylon 6T （Color Black）
  4. Cap: W/Halogen: Nylon PA46 UL94V-0 （Color Nature）; No Halogen: Nylon 6T （Color Black）

客供图面确认章
确认者 张强
确认日期 22年3月24日

Poles	Dimensions(mm)		
	A	B	C
2	2.00	8.00	5.00
3	4.00	10.00	7.00
4	6.00	12.00	9.00
5	8.00	14.00	11.00
6	10.00	16.00	13.00
7	12.00	18.00	15.00
8	14.00	20.00	17.00
9	16.00	22.00	19.00
10	18.00	24.00	21.00
11	20.00	26.00	23.00
12	22.00	28.00	25.00
13	24.00	30.00	27.00
14	26.00	32.00	29.00
15	28.00	34.00	31.00
16	30.00	36.00	33.00

喬訊電子工業股份有限公司
CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-1261-XXXXXX(XX)

2.00mm WIRE TO BOARD CONN, STRAIGHT & SMT TYPE

APPROVED BY	SCALE	UNIT
張育瑞	1:1	mm
CHECKED BY	PROJ	VER NO.
劉 娜		a20
DRAWN BY	DATE	SIZE
曾慶根	2022/03/15	A4

TOLERANCE		SHEET
.0	±0.30	1/1
.00	±0.20	
.000	±0.10	
ANGLE		
0°	±1°	
.0°	±	

LTR	REVISION RECORD	NAME	DATE
11	修改齒素選項，將NH選項變更回HF	吳弘文	2012/09/17
12	修改接地片材質	周美麗	2012/12/27
13	增列額定電壓	吳弘文	2013/01/18
14	增加內部尺寸3.5	吳弘文	2014/03/19
15	增加無蓋選項	吳弘文	2015/07/28
16	依規格書變更溫度範圍	曾慶根	2017/03/08
17	依業務需求（聯詰單CT-003592）新增鍍半金(SG)選項及顏色說明	周家慶	2017/06/05
18	增加13寸15寸卷塑盤內容說明	藍美娜	2017/08/24
19	增加鍍全金G規格選項	劉 娜	2021/12/09
20	依實際PIN針形狀，修改PIN針圖示	曾慶根	2022/03/15

CUSTOMER

Conforms to The RoHS Instruction