


REV.	DESCRIPTION	DATE
A0	New Drawing	2009/01/09

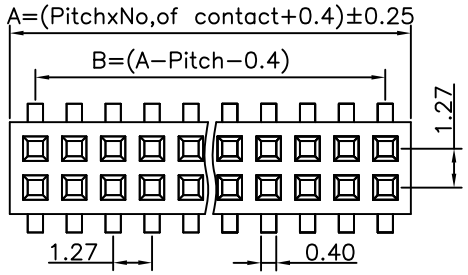

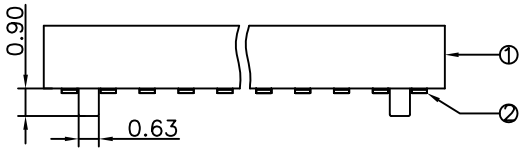

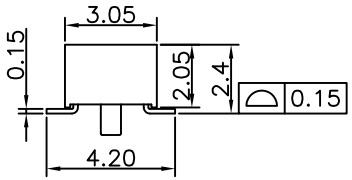

LTR	Part Name	Material	Description	QTY
1	Housing	NY-6T UL94V-0	260°C for 10 Seconds . Initial : 1000M Ohms Min. After Test : 500M Ohms Min.	1
2	Contact	Bronze C5191	Current Rating : 1.0A Initial : 20m Ohms Max. After Test : 40m Ohms Max.	XX
Normal Force : 60 Grams Average . Temperature Rating : -40°C ~ +125°C . Dielectric Withstanding Voltage : 500V AC/Min .				

F	H	C	D	-	S	S	X	X	X	G	1	N	B	W	N	-	C

PCB Contact Type
S | S MT

DC Dimension
S | 4.2mm

Number of Contact
06 to 50 contacts

Contact Plating
G1 Gold Flash


Plastic Base: (H x W)
N | 2.05 x 3.05 mm

Base Color
B | Black

With locating Peg
W | With locating Peg

Plastic
N | NY-6T

Packing
C | Tube

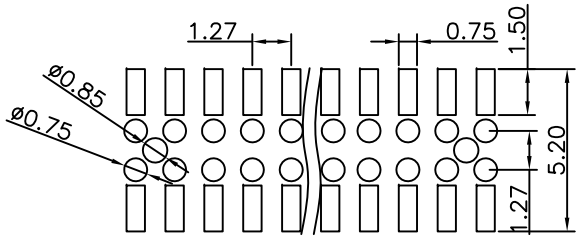

P.C.B LAYOUT

RoHS compliant

竣豪電子股份有限公司 Superior Tech Co., Ltd.	General Tolerance	TITLE	Pitch 1.27x1.27mm Female Header SMT,Dual Row	
	X. ± 0.5	DRAWN ZhaoXiaoLin	DATE 01-09-09'	NO. 002
	.X ± 0.3	CHECK XiaoPing	DATE 01-09-09'	PART NO. FHCD-SSXXXG1NBWN-C
	.XX ± 0.2	APPROVED JONH	DATE 01-09-09'	CUSTOMER NO.
	.XXX ± 0.1			
	角度 ± 5°			

REV.	UNIT	SCALE
A0	mm	4:1