

RoHS Compliant

Revision	Modify Record	Date
A/0	First Drawing	04/22/2020
A/1	變更外殼形狀	07/01/2024

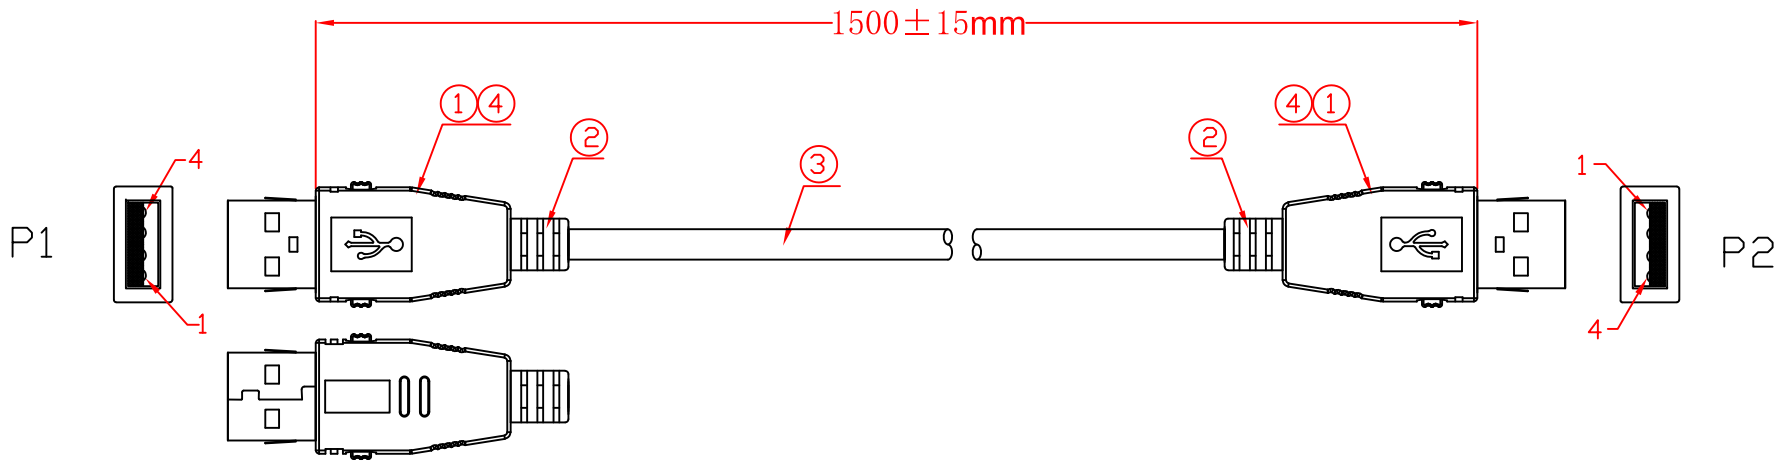

PIN ASSIGNMENT

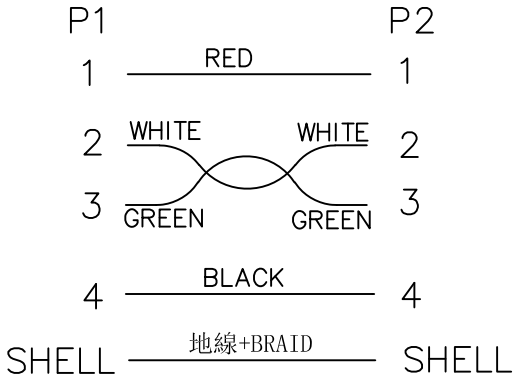


ELECTRICAL TEST:

1.OPEN/SHORT/INTERMITTENCE:100% TEST LINE-PROCESS
2.INSULATION RESISTANCE:DC300V 20mΩ(MIN)
3.HI-POT:300V AC/1Scc 1mA
4.CONTACT RESISTANCE:3Ω(MAX)

NOTE:

產品使用材料不含紅磷

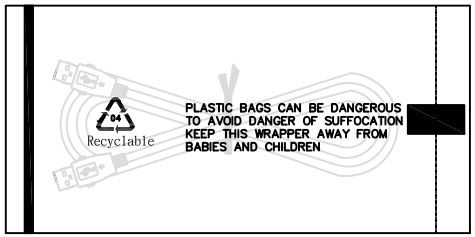

包裝方式:

如圖8字繞線, 單條包裝, 膠帶封口

No.	Part No.	Q'ty	Units	Specification
3	18-0428-010150-4	1	PCS	UL2725 USB2.0 28#*1P+24#*2C+AEB 80B OD:4.5mm BLACK L:1500mm
2	89-1001-0050	20	g	MOLDED PVC 50% BLACK
1	91-1004-0003	2	PCS	USB A+LOCK TYPE 4PIN MALE 裝配式

JAWSSTECH 兆鈺科技有限公司
JAWSSTECH TECHNOLOGIES LIMITED
地址:臺灣 新北市汐止區大同路二段171號3樓之3
TEL:886-02-86926686 FAX:886-02-86926343 Web:www.jawscable.com

Quality Symbols: ■ RoHS Compliant □ UL Approved

This drawing may not be copied or reproduced in any way,and may not be passed on to a third party without written permission. Part-ownership and part-copyright of JAWS

Description	USB A+LOCK TYPE 4PIN CABLE		
Customer Name	Yu Wei	Drawing No.	20191005
Customer No.	~~3KC00003945~~	Designed By	Liliqiong
Produce No.	19-450-E019	Approved By	
Date	10/16/2019	Scale	Not to scale

Third Angle Projection

Units: ■ MM □ Inch

Size: A4