
REV.	DATE	DESCRIPTION	BY	APVD

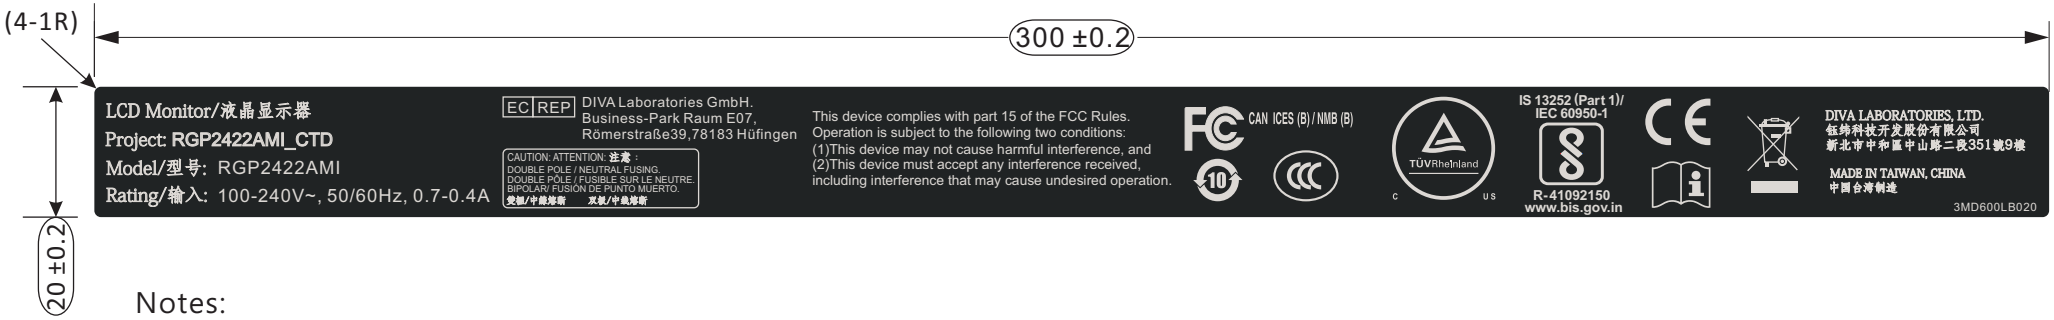

Notes:
1.Material: polyester film silver matt label (50#)
  Coated: polyester film transparent label
2.Color: background: Pantone 426C
  Character: Silver
3.Adhesive: acrylic adhesive
4.Material need to meet UL requirements
5.Meet UL second printing standard
6.Use PGDQ2/PGJI2 / WAI GHA /UL file #MH25635 and item: WG-7818-MS
7.材質+背膠總厚度t=0.1mm±0 .05mm
8.顏色、尺寸參照承認樣品
9.IQC inspection document : QWI-016

PM/SALES	
ENG.DEPT	SAFETY

RANGE OF DIMENSION	TOLERANCE CLASS DESIGNATION		
		V	
	f	m	c
UP TO 30	±0.10	±0.20	±0.50
ABOVE 30~120	±0.15	±0.30	±0.80
ABOVE 120~315	±0.20	±0.50	±1.20
ABOVE 315~1000	±0.30	±0.80	±2.00
ANGLE±1° (±1.75/100)			

THIRD ANGLE PROJECTION	UNITS: mm	SCALE: 1/1	SHEET: 1/1	MODEL NO.:RGP2422AMI_CTD
	MATERIAL:		TREATMENT:	
DSGD by	COCO	2024/12/27	PART NAME: MODEL LABEL	
APVD by			PART NO.: 3MD600LB020	VER. 0
APVD NO.:	FILE NAME: RGP2422AMI_CTD.cdr		DIVA Laboratories ,Ltd.	