

RoHS Compliant

Customer P/N	P/N:XXXXXX


Rev	Revision note	Date
A	Initial Released.	2025-03-28

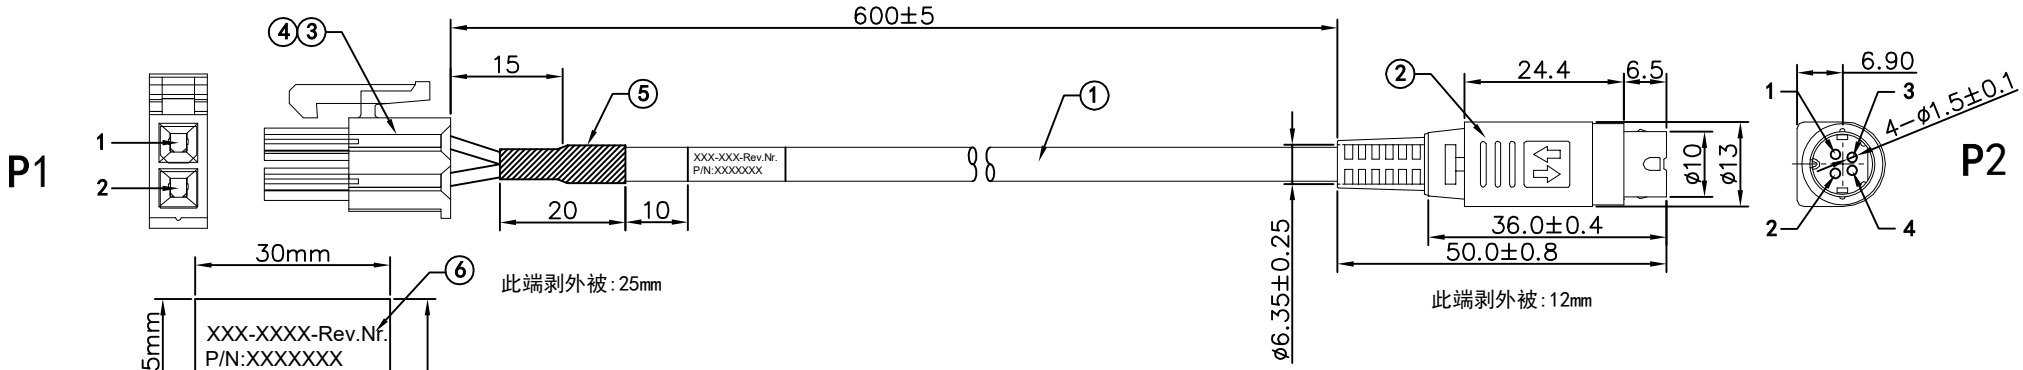

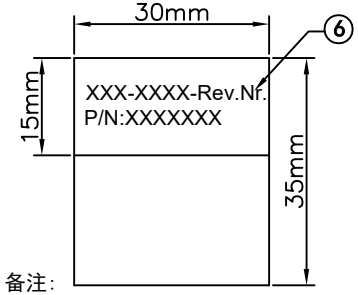


备注:

1. 字体:Arial
2. 字高:2.3
3. 材质:白底黑字上部分，下部分透明。

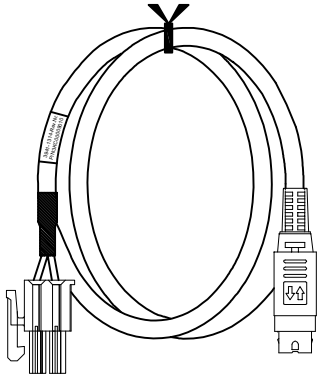

扎线图示

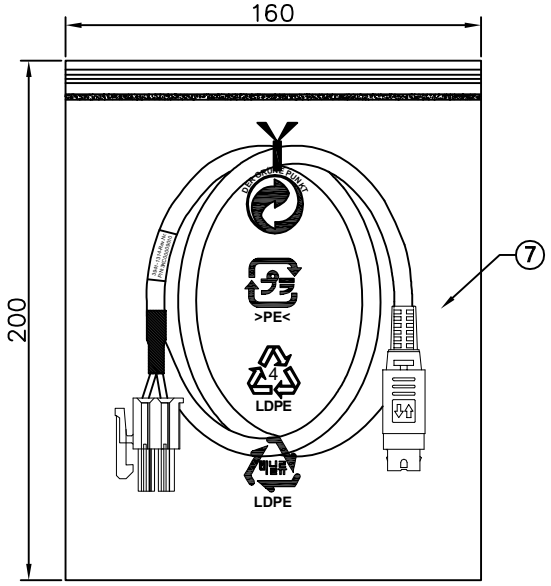

装PE锁骨袋

PIN ASSIGNMENT

P1		P2
2	GREEN	1
2	WHITE	2
1	BLACK	3
1	RED	4

NOTE:

1. ELECTRICAL TEST;
   (1-1). 100% OPEN, SHORT&MISWIRE;
   (1-2). INSULATION RESISTANCE:DC 300V, 0.1s, 10MΩ Min;
   (1-3). CONTACT RESISTANCE:3Ω Max;
   (1-4). WITHSTAND VOLTAGE:AC 100V, 0.1s, 0.5mA Max.
2. PRODUCTS MUST COMPLY WITH THE COMPANY ENVIRONMENTAL MATERIAL MANAGEMENT STANDARD RoHS REQUIREMENTS.

No.	DESCRIPTION & MATERIAL	Q'ty	Unit
7	200*160*0.05mm 印四国环保LDPE锁骨袋	1	pcs
6	30*30mm 标贴 材质:上部分铜版纸白底黑字 下部分透明	1	pcs
5	ø6.0 HEART SHRINK TUBE BLACK L=20mm	1	pcs
4	MOLEX P/N:39-00-0038 TER	2	pcs
3	MOLEX P/N:39-01-2020 HSG	1	pcs
2	KYCON P/N:KPPX-4P CONNECTOR	1	pcs
1	UL2464 22#*4C+D+AL BLACK COLOR PVC JACKET OD:5.2mm	647	mm

APPOVALS		DATE
DRAWN	Ricky	2025-03-28
CHECKED	Joan	2025-03-28
APPROVED		

CHENNYUE info@Chennyue.com

TITLE: POWER 2P TO KPPX-4P CABLE L=600mm

DWG No.: 210.LS10 Rev: A

Scale: Free | All dimensions for reference only dimensions are in millimeters. | Page 1of1 | Size A4

PROPRIETARY INFORMATION NOTICE:
This drawing and/or confidential information which shall not be reproduced, Transferred to other documents Disclosed to others. Or used for any other purpose without the prior written permission of Chennyue Co.,LTD. This proprietary information notice applies to all sheets of this drawing.