**收件者:** sharon_yeh
**主旨:** RE: Linden 7" Auris LCM EOL新版比較及評估

**From:** sharon_yeh [mailto:sharon_yeh@diva.com.tw]
**Sent:** Tuesday, April 01, 2025 4:49 PM
**To:** 'kevin_peng' <kevin_peng@diva.com.tw>; 'Anderson_Wei 魏品倫' <anderson_wei@diva.com.tw>; 'Jenny_Peng 彭娟芩' <jenny_peng@diva.com.tw>; 'owen_chiang 江佳霖' <owen_chiang@diva.com.tw>
**Cc:** 'FW-RexWang 王寶源' <rexwang@diva.com.tw>; 'LaslieChen 陳志偉' <lasliechen@diva.com.tw>; 'JackyLu 盧俊宇' <jackylu@diva.com.tw>; 'Michael_Young 楊建勛' <michael_young@diva.com.tw>; 'EricChang 張鈞凱' <ericchang@diva.com.tw>
**Subject:** RE: Linden 7" Auris LCM EOL新版比較及評估

Hi Kevin,

熒茂EC後的新料號1070M032A1
*由於原料號有14碼，有特別再跟Mildex確認，他們回覆說，改系統後，新案都變為10碼

Best Regards,
Sharon Yeh #242
Product Management Dep.

DIVA Labs.

**From:** sharon_yeh [mailto:sharon_yeh@diva.com.tw]
**Sent:** Monday, March 31, 2025 1:30 PM
**To:** 'kevin_peng' <kevin_peng@diva.com.tw>; 'Anderson_Wei 魏品倫' <anderson_wei@diva.com.tw>; 'Jenny_Peng 彭娟芩' <jenny_peng@diva.com.tw>; 'owen_chiang 江佳霖' <owen_chiang@diva.com.tw>
**Cc:** 'FW-RexWang 王寶源' <rexwang@diva.com.tw>; 'LaslieChen 陳志偉' <lasliechen@diva.com.tw>; 'JackyLu 盧俊宇' <jackylu@diva.com.tw>; 'Michael_Young 楊建勛' <michael_young@diva.com.tw>; EricChang 張鈞凱 <ericchang@diva.com.tw>
**Subject:** RE: Linden 7" Auris LCM EOL新版比較及評估

Hi Team Members,

客戶尚未回覆案子要不要做，但Ryan指示EC後LCM要下單買二片來做驗證
請EE/EMI用附件的PDF傳簽圖面並申請新料號 (ME Owen Chiang已簽回)，謝謝

Best Regards,
Sharon Yeh #242
Product Management Dep.

DIVA Labs.

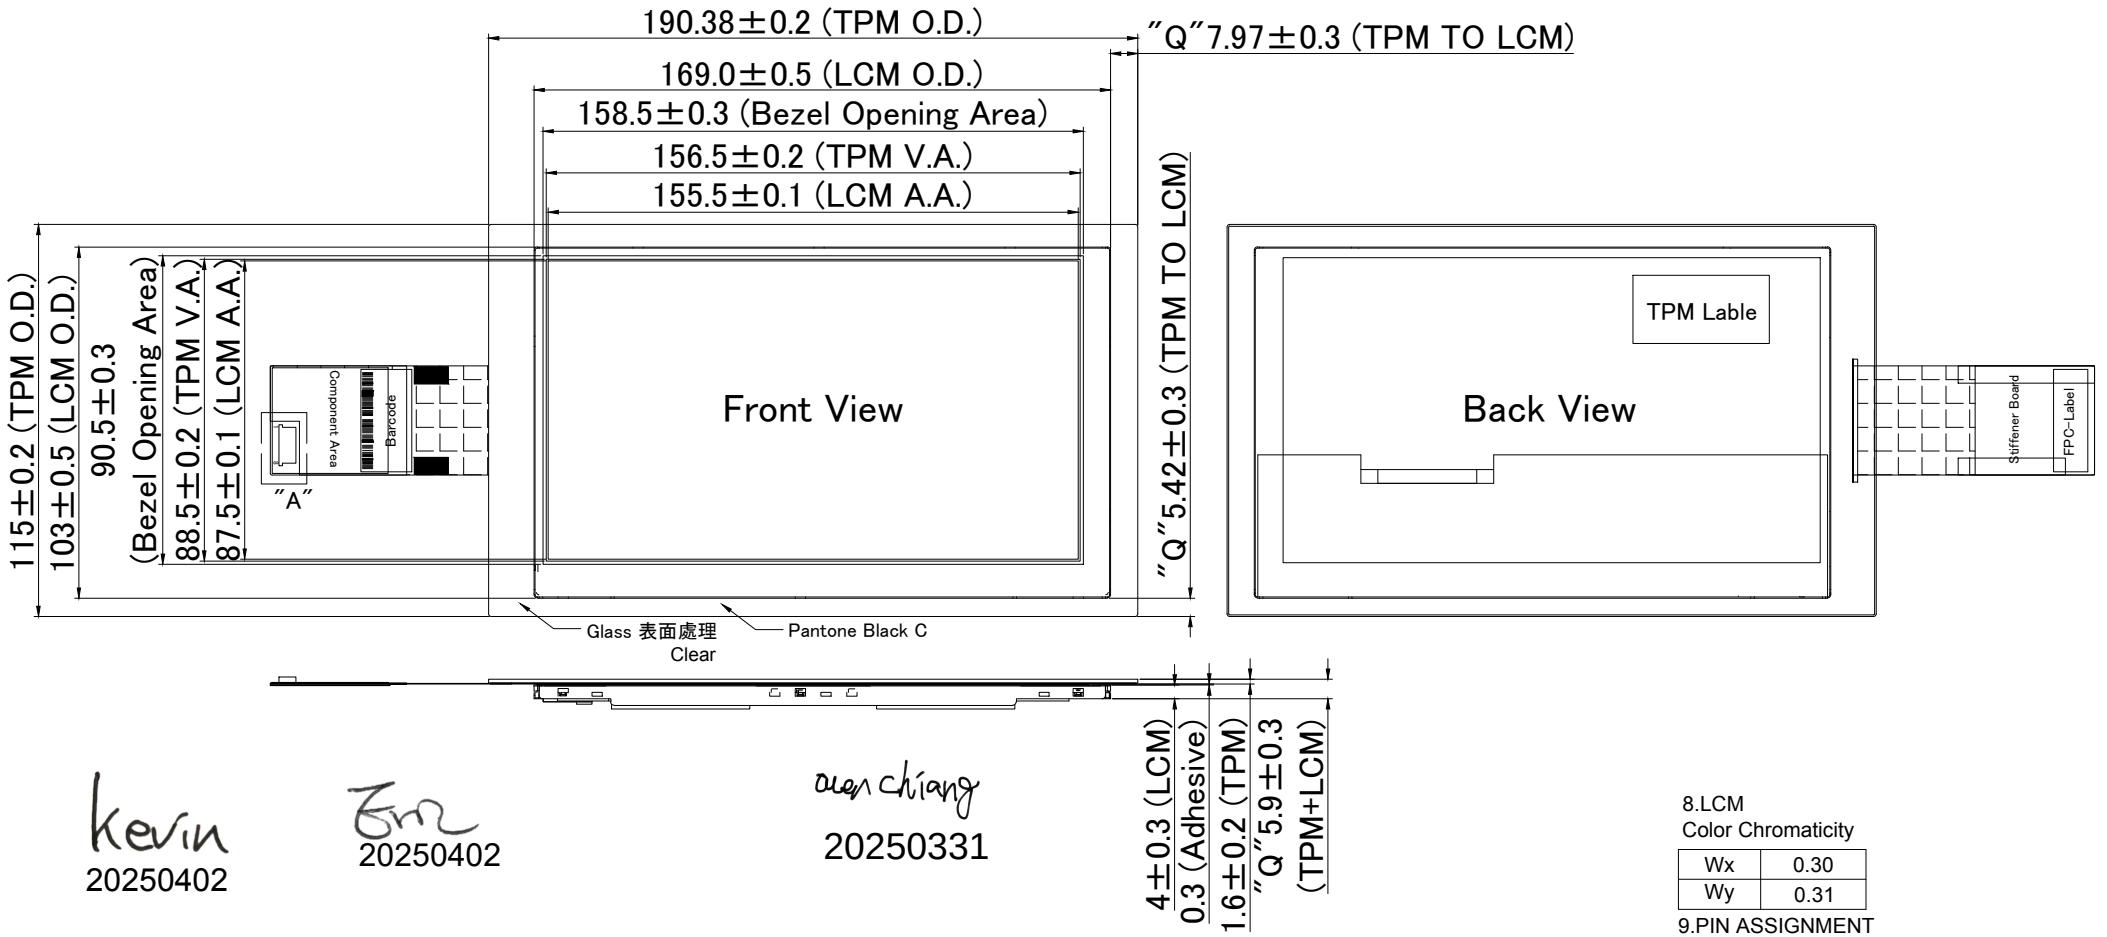


kevin
20250402

20250402

aven chiang
20250331

8.LCM
Color Chromaticity

| | |
|---|---|
| Wx | 0.30 |
| Wy | 0.31 |

9.PIN ASSIGNMENT

| USB | |
|---|---|
| 1 | VCC_5V |
| 2 | USB_Power |
| 3 | D- |
| 4 | D+ |
| 5 | USB_GND |
| 6 | GND |
| 7 | NC |
| 8 | NC |

10.The head of FPC can not pulled.




11.Commponent area of stiffener board on FPC can not be bent.






Detail A
Scale 4:1

1. Material Characteristics

| Property | Requirement |
|---|---|
| Luminance | 412 cd/m²(Min.) |
| Surface hardness | 7H |
| Operating temperature | -20 ~ 70 °C |
| Storage temperature | -20 ~ 70 °C |
| Operating Humidity | 20 ~ 80% RH |
| Storage Humidity | 30 ~ 80% RH |

2.Operating Humidity from 20% to 80%, no dew condensation shall be acceptable.
3.Storage Humidity from 30% to 80%, no dew condensation shall be acceptable.
4.Tolerance no specified : ± 0.50mm
5.Marked the size of the "Q" key measurement size.
6.LCM PIN ASSIGNMENT Please refer to LCM SPEC.
7.LCM MODEL NO. : JDI TX18D204VM0BAA

| SYMBOL | DATE | REVISED DESCRIPTIONS | NOTE | CUSTOMER APPROVED |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| D01.1 | 2025/03/27 | 新發行 | | |

| 燊茂光學股份有限公司 MILDEX OPTICAL INC. | | |
|---|---|---|
| Approve | Check | Design |
| 盧宏逸 | | 蘇正維 |

| | |
|---|---|
| DWG-NO. | 070M032-D01.1 |
| SCALE | ----- |
| UNIT | mm |
| DATE | 2025.03.27 |
| SHEET NO. | 1 / 1 |