
REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP


Specifications


- Voltage Rating: 150V AC/ DC
- Current Rating: 1A AC/ DC
- Withstanding Voltage: 500V AC/Minute.
- Insulation Resistance:500MΩ Min.
- Temperature Range: -25°C~+85°C
- Contact Resistance: Initial Value/20mΩ Max.
- After Environmental Testing/30mΩ Max.


Wafer


- Material:Pin:Brass/Gold-flash Or Gold-flash15u"
  Solder Tabs: Brass/Gold-flash Or Gold-flash15u"
  Wafer: PA9T UL94V-0
  Cap: PA9T UL94V-0
- Q'ty: 1,000 Pcs/Reel

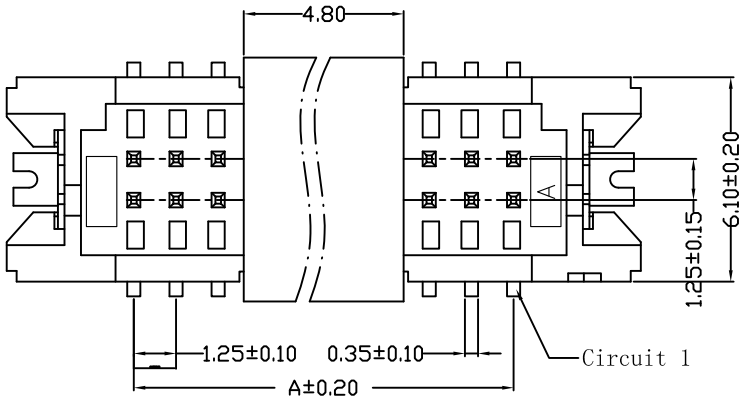

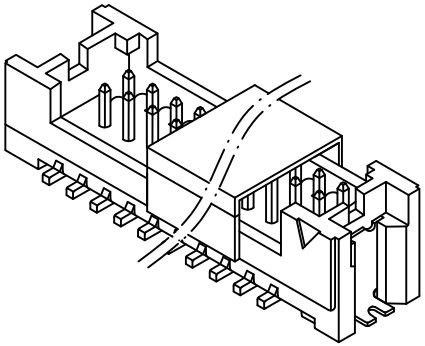

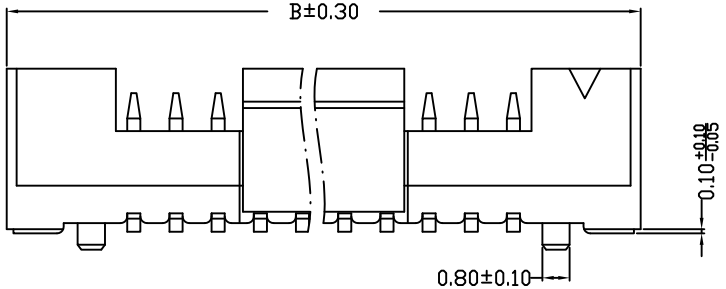

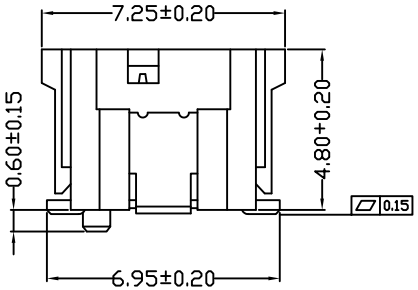

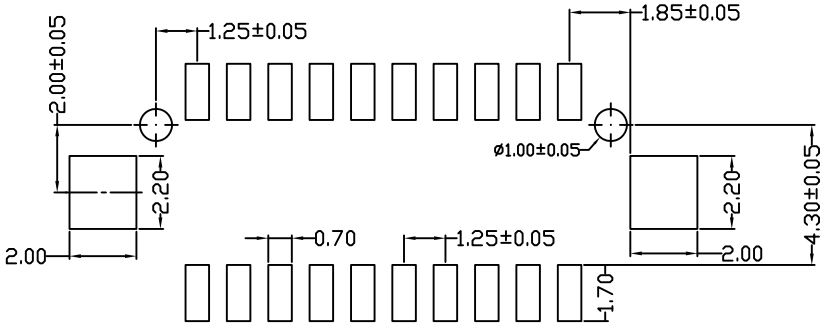


P.C.B. LAYOUT


Poles	Part No	Dimensions (mm)	
		A	B
10	2*05P	5.00	12.50
12	2*06P	6.25	13.75
14	2*07P	7.50	15.00
20	2*10P	11.25	18.75
24	2*12P	13.75	21.25
30	2*15P	17.50	25.00
40	2*20P	23.75	31.25
50	2*25P	30.00	37.50


TECHNIK INDUSTRIAL CO.LTD.


.X: ±0.38 X': ±3' .XX: ±0.25 .X': ±2' .XXX: ±0.13 .XX': ±1'	NAME: 针座 1.25-2x15P 立贴 加盖 带0.8柱 米黄色
APPD. JM_Zheng	PJ. NO.: WT.04.61-85-M016
CHKD. LYX	SIZE: A4 DRW NO.:
DR. TSP	FINISH: SEE NOTES MAT'L.: SEE NOTES
	SCALE: N/A REV.: A0 UNIT: mm PAGE: 1/2


REV.	ECN NO.	CONTENT	DATE	ENGINEER
A0		Initial release	/	TSP

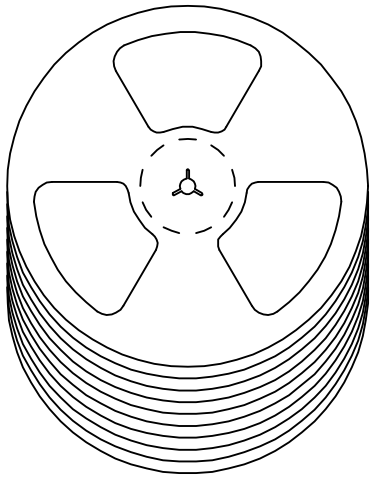

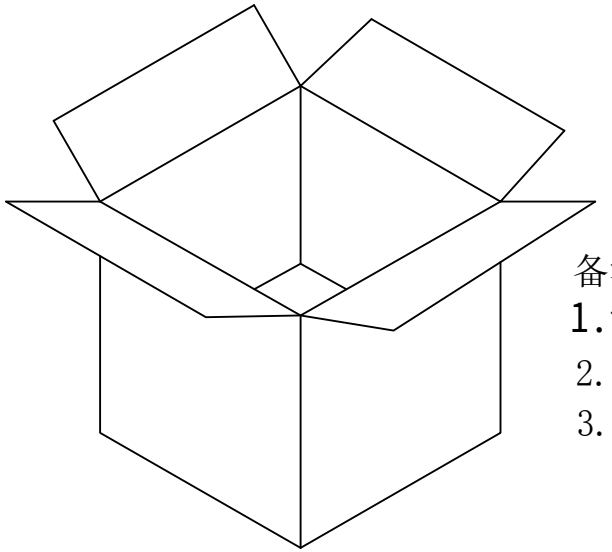

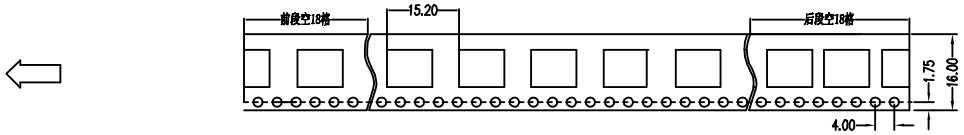

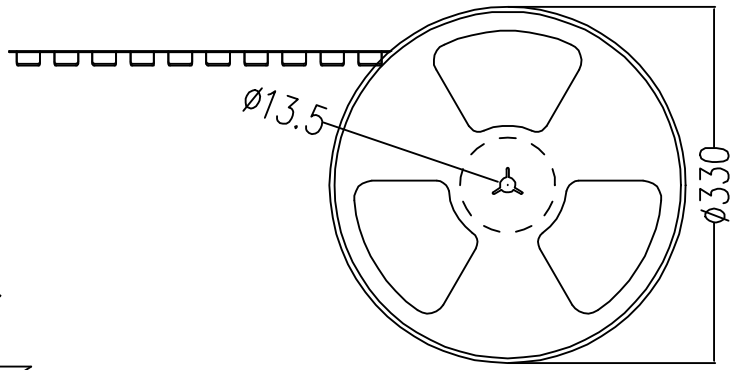

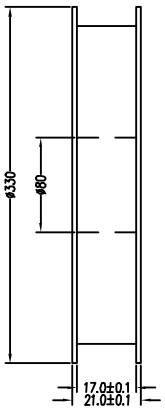

备注：

1.包装数量：1000/PCS/卷，10卷/箱

2.包装袋长度：每卷前后各空10-20个空格，中间包装。

3.材质：

载体：聚丙烯（PS），

上带：聚乙烯（PET），

卷盘：聚苯乙烯。

纸箱规格：345*345*23MM

纸箱规格：345*345*35MM

TECHNIK INDUSTRIAL CO.LTD.

.X: ±0.38 .XX: ±0.25 .XXX: ±0.13	X°: ±3° .X°: ±2° .XX°: ±1°	NAME: 针座 1.25-2x15P 立贴 加盖 带0.8柱 米黄色	
APPD.	JM_Zheng	PJ. NO.: WT.04.61-85-M016	
CHKD.	LYX	SIZE: A4	DRW NO.:
DR.	TSP	FINISH: SEE NOTES	MAT'L.: SEE NOTES
		SCALE: N/A REV.: A0	UNIT: mm PAGE: 2/2