PART NO.	REV	SYMBOL	DESCRIPTION	LOCATED	REASON	SIGN	DATE
	A		FIRST RELEASE				



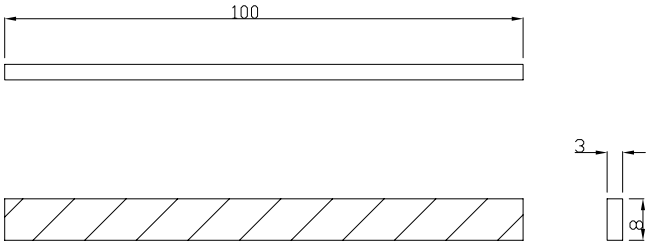

NOTES:
1. EMI Effectiveness >94(300MHZ/db)
   >72(500MHZ/db)
2. Conductive Numerical: <0.05 Ω
3. Adhesive: Conductive acrylic
4. Adesion Strength: >1.0 kg/25mm2
5. Heat Resistance: -18~100
6. Tape Resistance: <0.05 Ω
7. Density: 50+-5 (Kg/M3)
8. Coating Thickness: 0.03mm
9. Color: Brown
10. Tolerencd refer to the class grade B,
    unless other specified.

MODEL	E2211HB	NAME	GASKET 100X8X3 E2211HB			
DRN	Tammy He	14-Oct-11	MATERIAL			
DSN	Tammy He	14-Oct-11	FINISH			
CKD	Margie Ma Simon Ho	14-Oct-11	SCALE	1.000	DIM IN	mm
APPD		14-Oct-11	SHEET	OF	CAVITIES	

Qisda Corporation

TOLERANCE UNLESS OTHERWISE SPECIFIED (±)

CLASS	A	B	C	D	E	F	G
< 8mm	0.05	0.1	0.1	0.2	0.2	0.4	0.4
8 ~ 25mm	0.08	0.15	0.15	0.3	0.3	0.6	0.6
25 ~ 80mm	0.12	0.2	0.25	0.4	0.5	0.8	1.0
80 ~ 250mm	0.25	0.3	0.4	0.6	0.8	1.2	1.5
250 ~ 800mm	0.5	0.6	0.8	1.0	1.5	2.0	3.0
> 800mm	1.0	1.0	1.5	1.7	3.0	4.0	6.0
ANGLE	0.5						

FILE NAME	GASKET 100x8x3
PART NO.	4G.19804.001