REV.	DESCRIPTION	DATE
A	New Drawing	2025/08/12

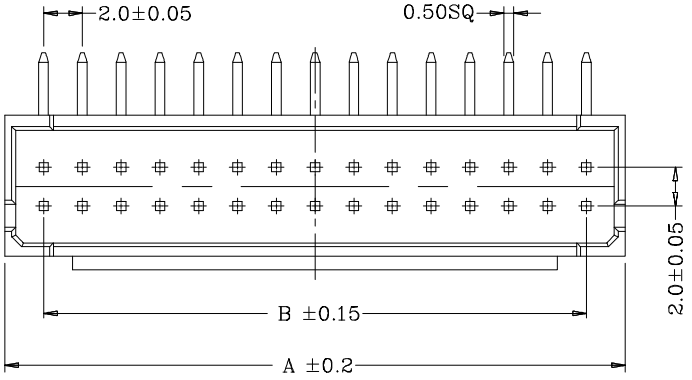

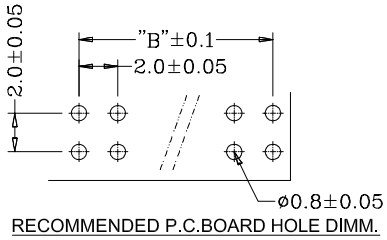

RECOMMENDED P.C.BOARD HOLE DIMM.

Material: Nylon 46, UL 94V-0
Conductor: Brass, Tin-Plated
Available: 8~60P
Current Rating: 2A AC/DC
Voltage Rating: 250V AC/DC
Contact Resistance:30mΩ Max.
Insulation Resistance:1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Operating Temperature Range:-25°~85°C

Circuits	Dim. A	Dim. B
8	10.0	6.00
10	12.0	8.00
12	14.0	10.00
14	16.0	12.00
16	18.0	14.00
18	20.0	16.00
20	22.0	18.00
22	24.0	20.00
24	26.0	22.00
26	28.0	24.00
28	30.0	26.00
30	32.0	28.00
32	34.0	30.00
34	36.0	32.00
36	38.0	34.00
38	40.0	36.00
40	42.0	38.00
60	62.0	58.00

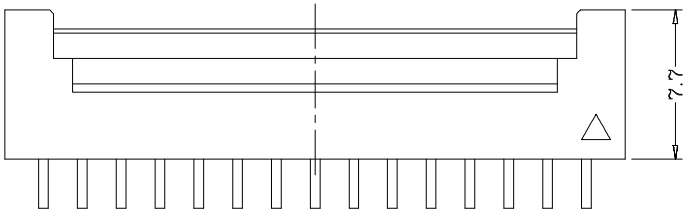

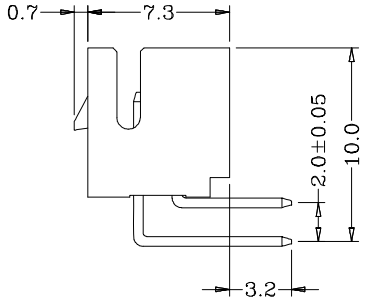

WRDD-RDXXXT2OWEA-D59

- PCB Contact Type: R = 90° DIP
- Housing Type: D = Dual Row
- Number of Contact: 08~60 contacts
- Contact Plating: T2 = Tin Plated
- Base Color: W = White
- Insulation: O = Without "K"; E = NY-46
- Packing: A = PE Bag
- Series No.: D59

Unless otherwise specified,all decimal dimensions(未標註公差值):±0.20mm. RoHS compliant

竣豪電子股份有限公司
Superior Tech Co., Ltd.

REV.	UNIT	SCALE
A	mm	1:1

General Tolerance	
X. ± 0.3	
.X ± 0.2	
.XX ± 0.15	
.XXX ± 0.1	
角度	± 5°

TITLE	WAFER PH2.0 R/A DIP		
DRAWN	Jacky	DATE 08-12-25'	NO. D076
CHECK	Tom	DATE 08-12-25'	PART NO. WRDD-RDXXXT2OWEA-D59
APPROVED	Tom	DATE 08-12-25'	CUSTOMER NO.