| REV | DATE | DESCRIPTION | DRAFT | APPROVED |
|---|---|---|---|---|
| 0 | 0x1-01-26 | INITIAL RELEASE | KANE | |

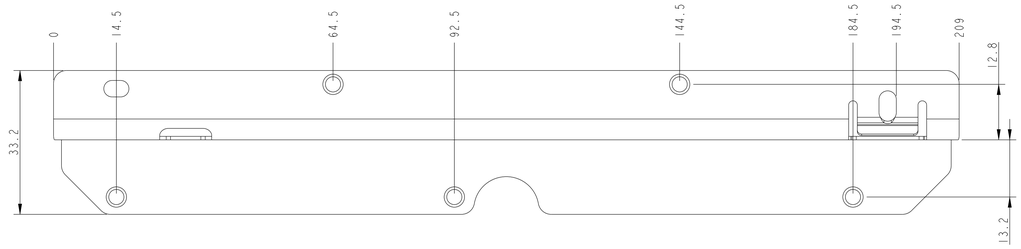








NOTE:
1. MATERIAL: SECC, T=0.8 MM, CHROMATE FREE.
2. THREADED TORQUE:
   M3 >10 kgf/cm.
   M4 >12 kgf/cm.
3. BURRS & SHARP EDGE(S) ALLOWED IN 0.03 MM MAX..
   BASED ON THE PRINCIPLE OF NOT HURTTING HANDS.
4. NON-DIMENSIONED GEOMETRY: SEE 3D FILE.
5. PACKING: PE BAG (EACH).
6. RoHS COMPLIANT.
7. DIVA QC INSPECTION DOCUMENT NO.: QWI-013 (Hinge)
   QWI-014 (Metal)

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE IN MM. TOLERANCES:
X ± 0.5
.XX ± 0.30
.XXX ± 0.125
ANGLE ± 1.0°
INTERPRET DIM AND TOL PER ASME Y14.5-2009

THIRD ANGLE PROJECTION

MATERIAL: SECC, T=0.8mm | FINISH:

DRAWN BY: KANE | Oct-01-26

CHECKED BY:

APPROVED BY:

Creo FILE NAME: 0238_234_IO_BKT.MI | APPROVED NO.:

DIVA Laboratories. Ltd.

PART NAME: 0238_234_IO_BKT_WK

PART NUMBER: | MFG. PART NUMBER

MODEL NAME: WUKONG | SIZE: A0 | SCALE: 2:1 | SHEET: 1 of 1 | REV: 0

THIS DOCUMENT IS SUPPLIED IN CONFIDENCE. NO REPRODUCTION OF THIS DOCUMENT, IN PART OR IN WHOLE OR TRANSFER OF THE ITEMS SHOWN MAY BE MADE WITHOUT THE COPYRIGHT OWNERS WRITTEN PERMISSION.

ASME STANDARD_MM