REV	DATE	DESCRIPTION	DRAFT	APPROVED
0	Nov-09-26	INITIAL RELEASE		

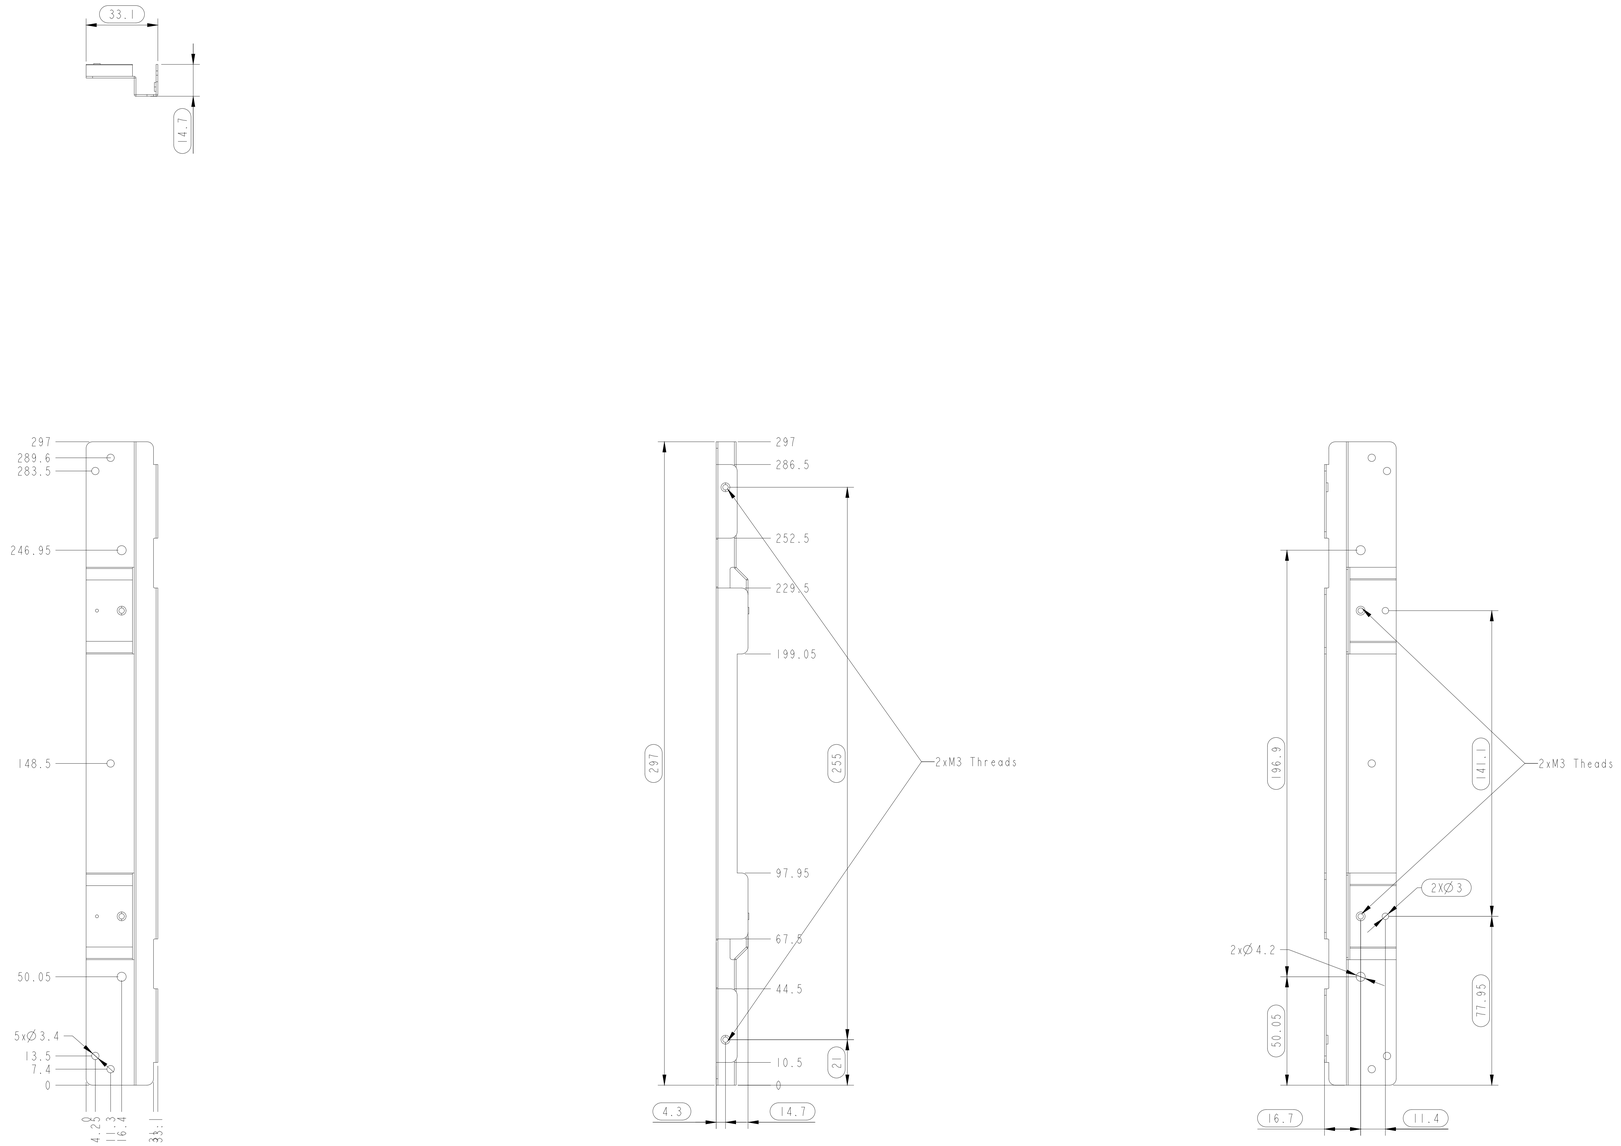

NOTE:
1. MATERIAL: SECC
2. THICKNESS: 0.8 MM
3. THREADED TORQUE:
   M3 >10 kgf/cm.
   M4 >12 kgf/cm.
4. BURRS & SHARP EDGE(S) ALLOWED IN 0.03 MM MAX..
   BASED ON THE PRINCIPLE OF NOT HURTTING HANDS.
5. NON-DIMENSIONED GEOMETRY: SEE 3D FILE.
6. PACKING: PE BAG (EACH).
7. RoHS COMPLIANT.
8. DIVA QC INSPECTION DOCUMENT NO.:QWI-014 (Metal)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM. TOLERANCES:
.X ± 0.5
.XX ± 0.25
.XXX ± 0.125
ANGLE ± 0.1°
INTERPRET DIM AND TOL PER ASME Y14.5-2009

THIRD ANGLE PROJECTION

MATERIAL: SECC	FINISH:	DIVA Laboratories, Ltd.	
DRAWN BY: Nov-09-26		PART NAME: SUPPORT BRACKET (RUH2762LM11-P)	
CHECKED BY:		PART NUMBER: 3MD552ME030	MFG. PART NUMBER
APPROVED BY:		MODEL NAME:	SIZE: A0 / SCALE: 1:1 / SHEET: 1 OF 1 / REV 0
Creo FILE NAME: DIP_INT_LAB7000.SEC2	APPROVED NO.:		

THIS DOCUMENT IS SUPPLIED IN CONFIDENCE. NO REPRODUCTION OF THIS DOCUMENT IN PART OR IN WHOLE OR PASSING OF THE CONTENTS OR THE COPIES SHOWN MAY BE MADE WITHOUT THE COPYRIGHT OWNER'S WRITTEN PERMISSION.

ASME STANDARD.MM