REV	DATE	DESCRIPTION	DRAFT	APPROVED
0	Nov-09-26	INITIAL RELEASE	AIKE	

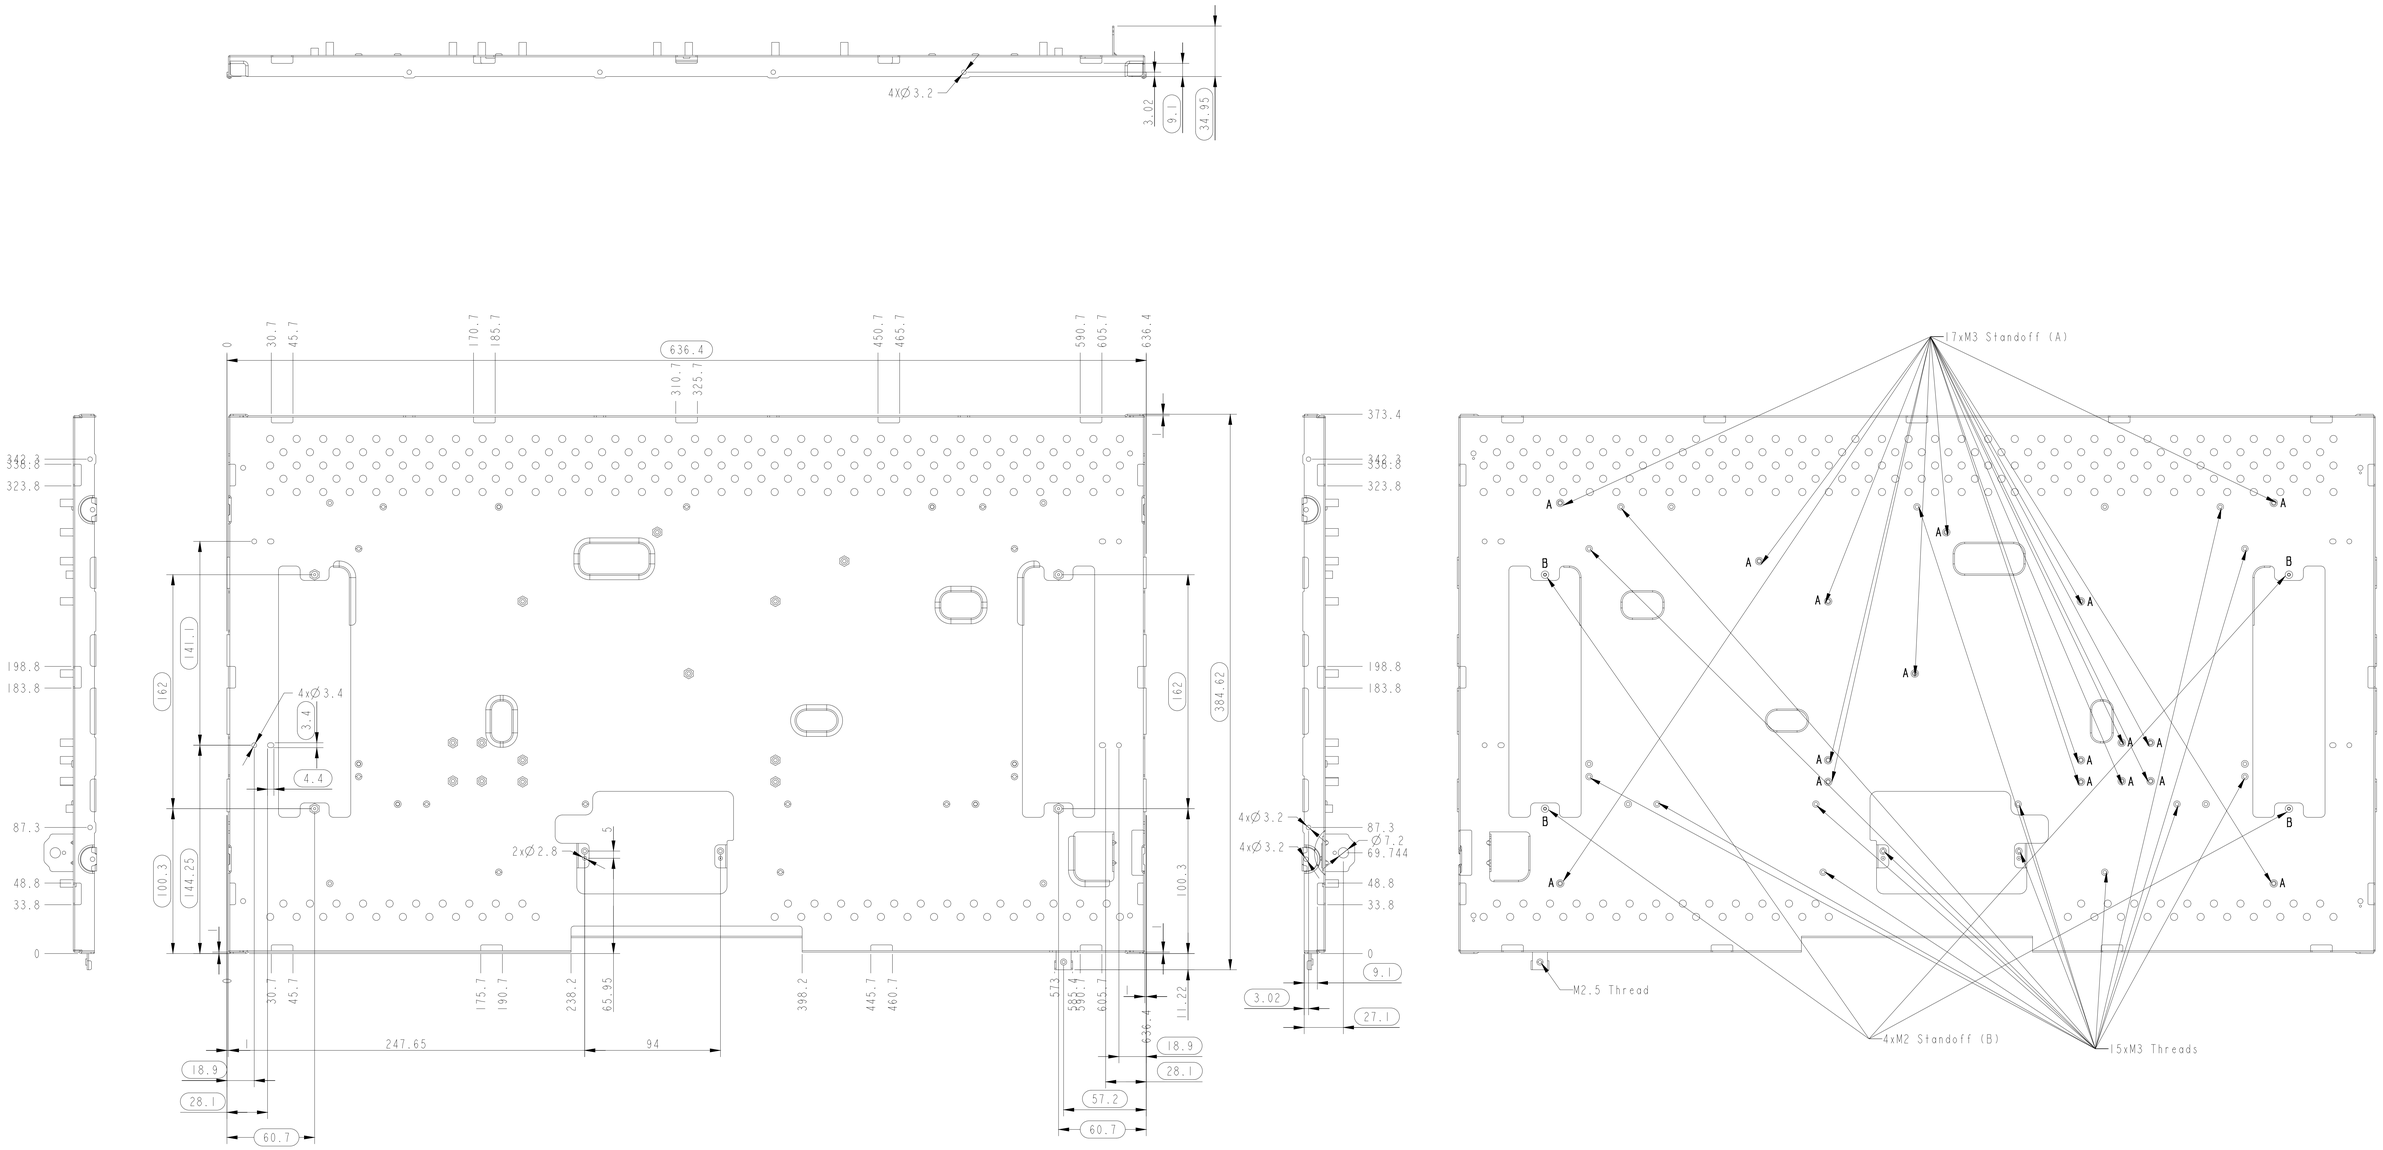



A
Standoff Height



B
Standoff Height

NOTE:
1. MATERIAL: SECC
2. THICKNESS: 1.0 MM
3. THREADED TORQUE:
   M3 >10 kgf/cm.
   M4 >12 kgf/cm.
4. BURRS & SHARP EDGE(S) ALLOWED IN 0.03 MM MAX..
   BASED ON THE PRINCIPLE OF NOT HURTTING HANDS.
5. NON-DIMENSIONED GEOMETRY: SEE 3D FILE.
6. PACKING: PE BAG (EACH).
7. RoHS COMPLIANT.
8. DIVA QC INSPECTION DOCUMENT NO.:QWI-014 (Metal)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM. TOLERANCES:
.X ± 0.5
.XX ± 0.20
.XXX ± 0.150
ANGLE ± 1.0°
INTERPRET DIM AND TOL PER ASME Y14.5-2009

THIRD ANGLE PROJECTION

MATERIAL: SECC	FINISH:	DIVA Laboratories, Ltd.	
DRAWN BY: Nov-09-26		PART NAME: MAIN BRACKET (RUH2762LM11-P)	
CHECKED BY:		PART NUMBER: 3MD552ME010	WFG. PART NUMBER:
APPROVED BY:		MODEL NAME:	SIZE: A0 / SCALE: 2:3 / SHEET: 1 OF 1 / REV: 0
Crea FILE NAME: MAIN_BRACKET(RUH2762LM11-P)	APPROVED NO.:		

THIS DOCUMENT IS SUPPLIED IN CONFIDENCE. NO REPRODUCTION OF THIS DOCUMENT IN PART OR IN WHOLE OR PASSING OF THE ITEMS SHOWN MAY BE MADE WITHOUT THE COPYRIGHT OWNERS WRITTEN PERMISSION.

ASME STANDARD.MM