REV	DATE	DESCRIPTION	DRAFT	APPROVED
0	Nov-09-26	INITIAL RELEASE		

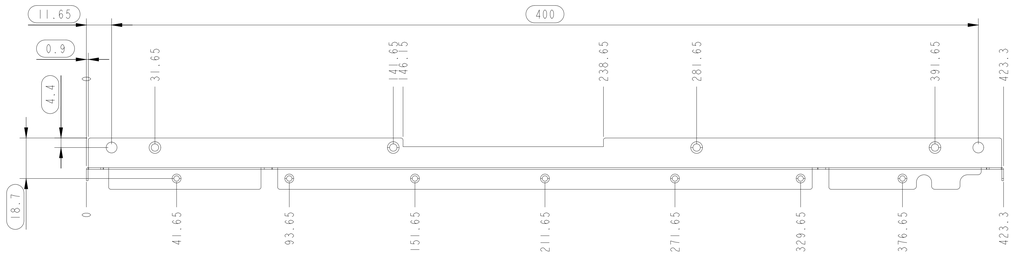

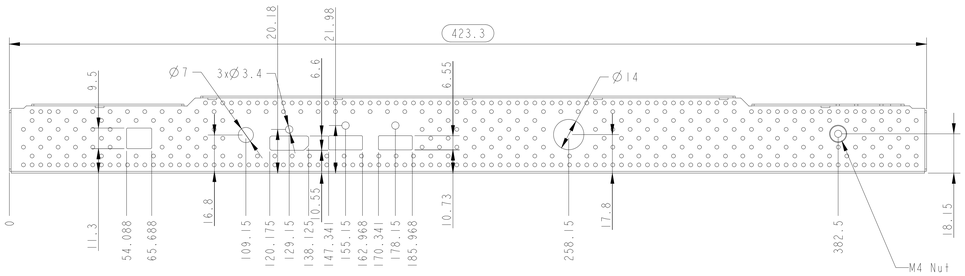

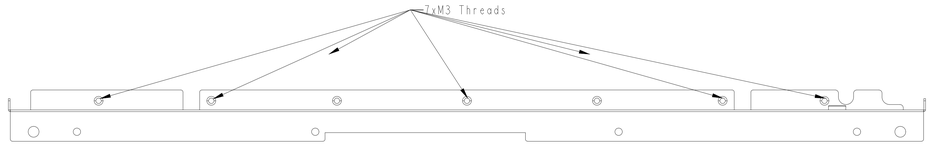



NOTE:
1. MATERIAL: SECC
2. THICKNESS: 0.8 MM
3. THREADED TORQUE:
   M3 >10 kgf/cm.
   M4 >12 kgf/cm.
4. BURRS & SHARP EDGE(S) ALLOWED IN 0.03 MM MAX..
   BASED ON THE PRINCIPLE OF NOT HURTTING HANDS.
5. NON-DIMENSIONED GEOMETRY: SEE 3D FILE.
6. PACKING: PE BAG (EACH).
7. RoHS COMPLIANT.
8. DIVA QC INSPECTION DOCUMENT NO.:QWI-014 (Metal)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN MM. TOLERANCES:
X : ± 0.5
.XX : ± 0.25
.XXX : ± 0.125
ANGLE : ± 1.0°
INTERPRET DIM AND TOL PER ASME Y14.5-2009

THIRD ANGLE PROJECTION

MATERIAL: SECC	FINISH:	DIVA Laboratories, Ltd.			
DRAWN BY: Nov-09-26		PART NAME: 10 BRACKET (RUH2762LM11-P)			
CHECKED BY:		PART NUMBER: 3MD552ME020		WFG. PART NUMBER	
APPROVED BY		MODEL NAME:	SIZE: A0	SCALE: 1:1	SHEET: 1 OF 1 REV 0
Crea FILE NAME: 10_BRT_RUH2762LM11_P	APPROVED NO.:	THIS DOCUMENT IS SUPPLIED IN CONFIDENCE. NO REPRODUCTION OF THIS DOCUMENT IN PART OR IN WHOLE OR TRANSFER OF THE TITLE SHOWN MAY BE MADE WITHOUT THE COPYRIGHT OWNERS WRITTEN PERMISSION.			

ASME STANDARD.MM