AP6P250N

Halogen-Free Product

Advanced Power Electronics Corp.

P-CHANNEL ENHANCEMENT MODE POWER MOSFET

- ▼ **Simple Drive Requirement**
- ▼ **Small Package Outline**
- ▼ **Surface Mount Device**
- ▼ **RoHS Compliant & Halogen-Free**



SOT-23S

BV_{DSS}	-60V
$R_{DS(ON)}$	250mΩ
I_D	-1.6A



Description

AP6P250N series are from Advanced Power innovated design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The SOT-23S package is widely preferred for commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

Absolute Maximum Ratings@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-60	V
V_{GS}	Gate-Source Voltage	±20	V
I_D@T_A=25℃	Drain Current, V_{GS} @ 10V[3]	-1.6	A
I_D@T_A=70℃	Drain Current, V_{GS} @ 10V[3]	-1.3	A
I_{DM}	Pulsed Drain Current[1]	-10	A
P_D@T_A=25℃	Total Power Dissipation	1.25	W
T_{STG}	Storage Temperature Range	-55 to 150	℃
T_J	Operating Junction Temperature Range	-55 to 150	℃

Thermal Data

Symbol	Parameter	Value	Unit
Rthj-a	Maximum Thermal Resistance, Junction-ambient[3]	100	℃/W

Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=-250uA	-60	-	-	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance[2]	V_{GS}=-10V, I_D=-1.6A	-	-	250	mΩ
		V_{GS}=-4.5V, I_D=-1A	-	-	300	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=-250uA	-1	-	-3	V
g_{fs}	Forward Transconductance	V_{DS}=-10V, I_D=-1A	-	3.8	-	S
I_{DSS}	Drain-Source Leakage Current	V_{DS}=-48V, V_{GS}=0V	-	-	-25	uA
I_{GSS}	Gate-Source Leakage	V_{GS}=±20V, V_{DS}=0V	-	-	±100	nA
Q_g	Total Gate Charge	I_D=-1A	-	5	8	nC
Q_{gs}	Gate-Source Charge	V_{DS}=-48V	-	1.5	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	V_{GS}=-4.5V	-	1.8	-	nC
$t_{d(on)}$	Turn-on Delay Time	V_{DS}=-30V	-	8	-	ns
t_r	Rise Time	I_D=-1A	-	5	-	ns
$t_{d(off)}$	Turn-off Delay Time	R_G=3.3Ω	-	17	-	ns
t_f	Fall Time	V_{GS}=-10V	-	3	-	ns
C_{iss}	Input Capacitance	V_{GS}=0V	-	450	720	pF
C_{oss}	Output Capacitance	V_{DS}=-25V	-	37	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	28	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage[2]	I_S=-1A, V_{GS}=0V	-	-	-1.3	V
t_{rr}	Reverse Recovery Time	I_S=-1A, V_{GS}=0V,	-	17	-	ns
Q_{rr}	Reverse Recovery Charge	dI/dt=100A/μs	-	9	-	nC

Notes:

1.Pulse width limited by Max. junction temperature.

2.Pulse test

3.Surface mounted on 1 in^2 copper pad of FR4 board, t ≤10sec ; 300 ℃/W when mounted on Min. copper pad.

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.
USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.
APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.
APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

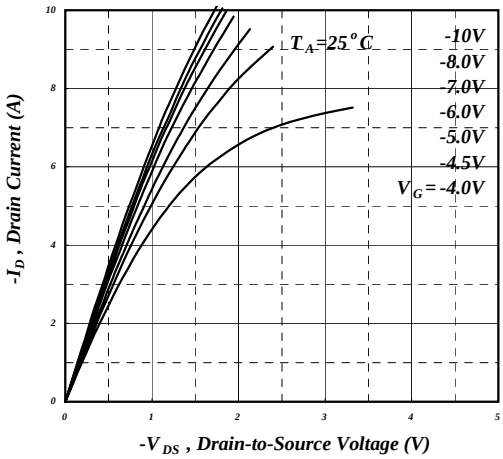

Fig 1. Typical Output Characteristics

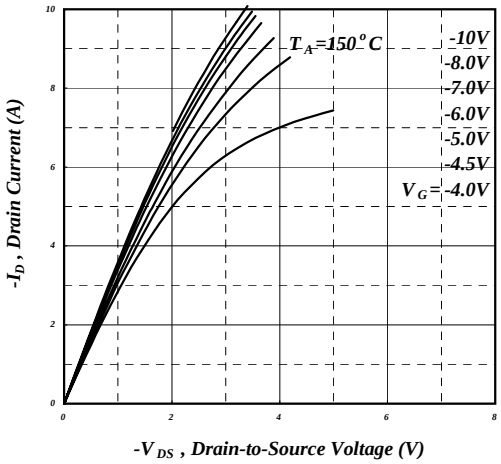

Fig 2. Typical Output Characteristics

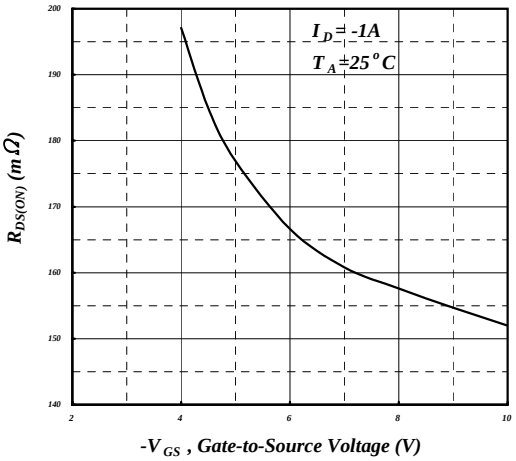

Fig 3. On-Resistance v.s. Gate Voltage

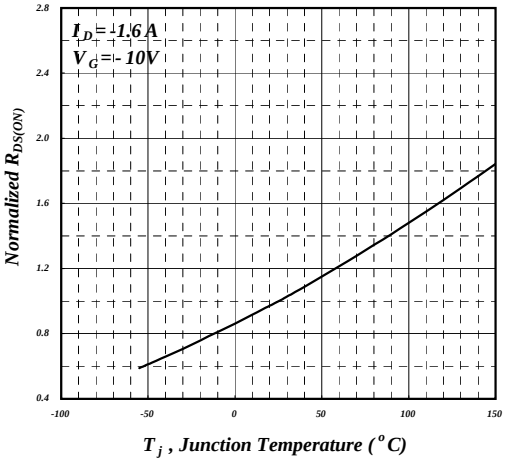

Fig 4. Normalized On-Resistance v.s. Junction Temperature

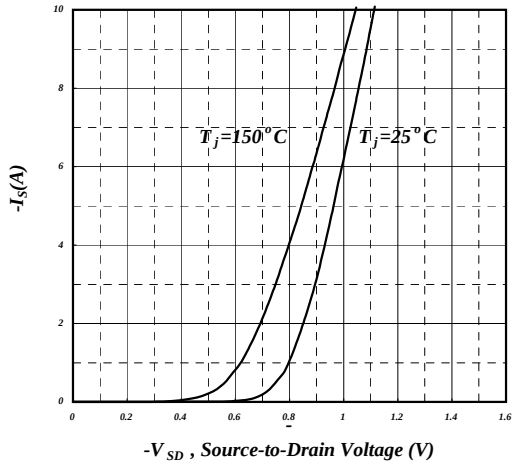

Fig 5. Forward Characteristic of Reverse Diode

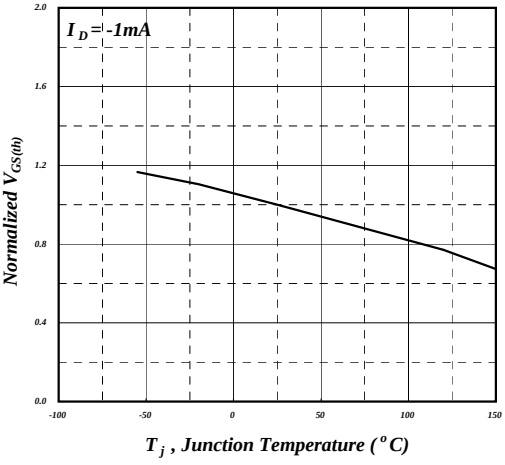

Fig 6. Gate Threshold Voltage v.s. Junction Temperature

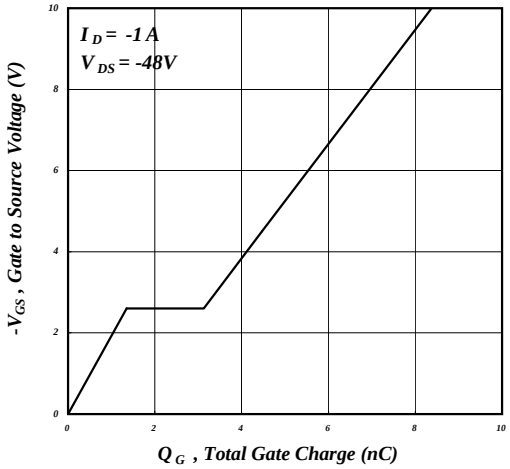

Fig 7. Gate Charge Characteristics

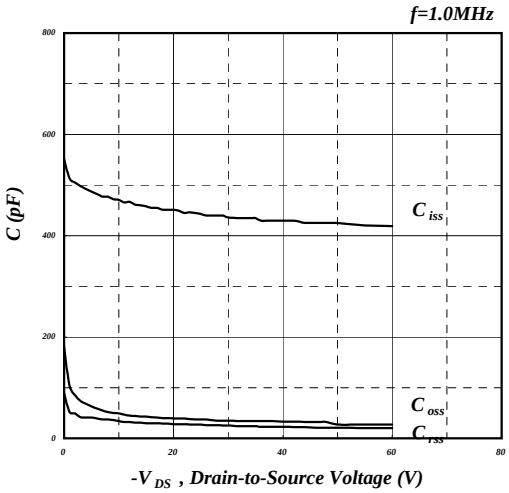

Fig 8. Typical Capacitance Characteristics

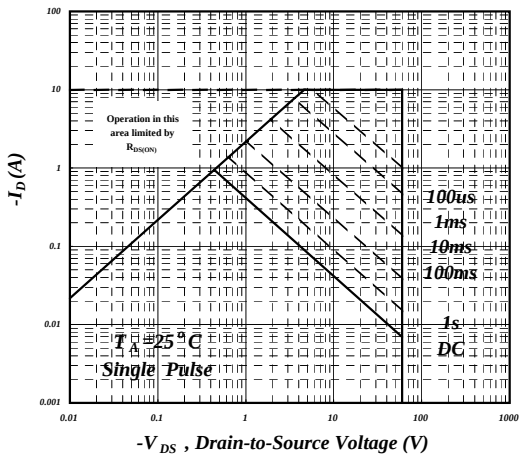

Fig 9. Maximum Safe Operating Area

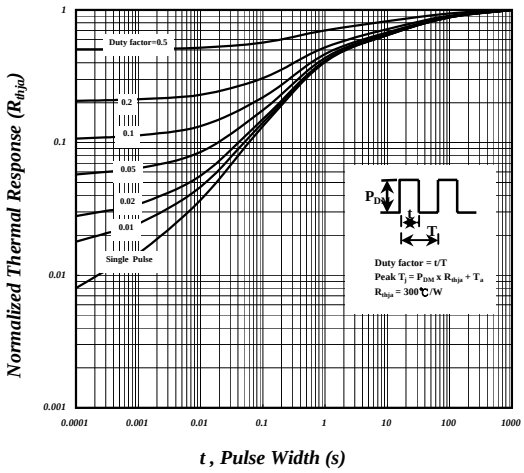

Fig 10. Effective Transient Thermal Impedance

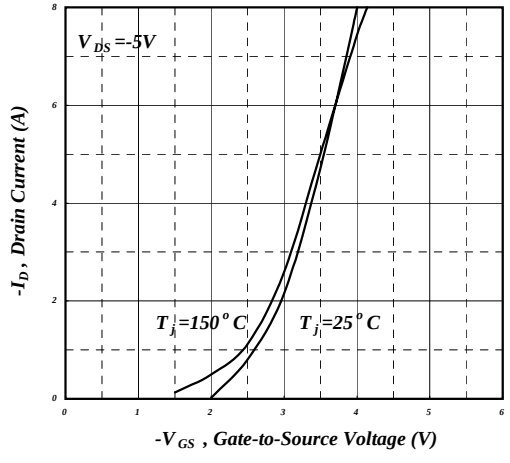

Fig 11. Transfer Characteristics

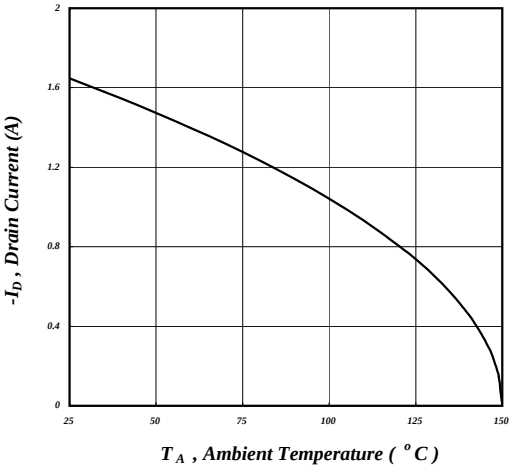

Fig 12. Drain Current v.s. Ambient Temperature

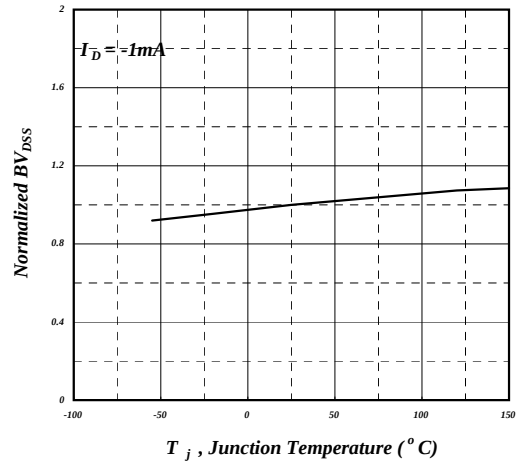

Fig 13. Normalized BV_{DSS} v.s. Junction Temperature

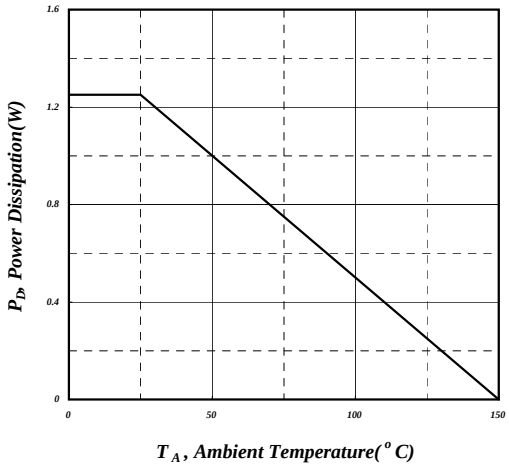

Fig 14. Total Power Dissipation

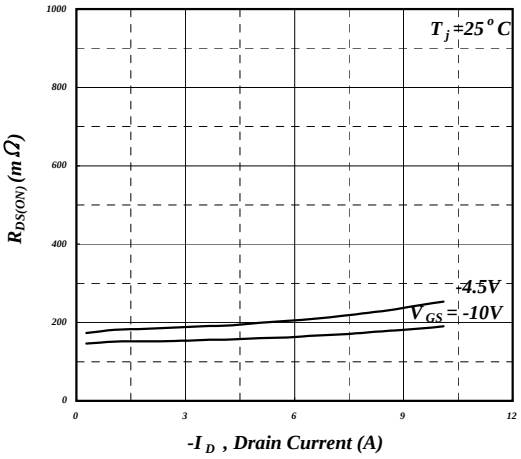

Fig 15. Typ. Drain-Source on State Resistance

MARKING INFORMATION

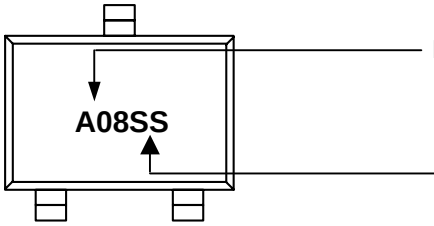

Part Number : A08

Date Code : SS

SS:2004,2008,2012,2016,2020...

SS:2003,2007,2011,2015,2019...

SS:2002,2006,2010,2014,2018...

SS:2001,2005,2009,2013,2017...

Package Outline : SOT-23S

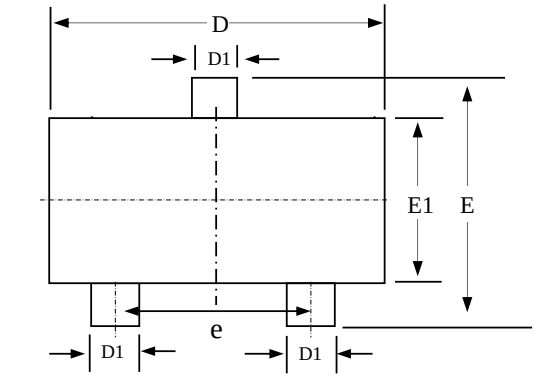

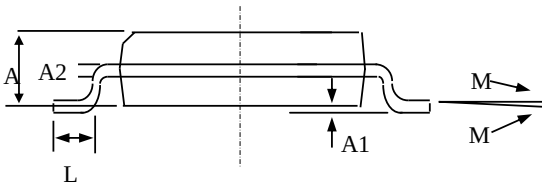

SYMBOLS	Millimeters		
	MIN	NOM	MAX
A	0.80	1.00	1.20
A1	0.00	—	0.10
A2	0.05	—	0.20
D1	0.30	0.40	0.50
e	1.80	1.90	2.00
D	2.80	2.90	3.10
E	2.10	2.40	2.70
E1	1.20	1.30	1.40
M	0°	5°	10°
L	0.20	—	0.60

1.All Dimension Are In Millimeters.

2.Dimension Does Not Include Mold Protrusions.

Draw No. M1-N3MIBF-G-v04

SOT-23S FOOTPRINT：

