REV.	DATE	DESCRIPTION	BY	APVD



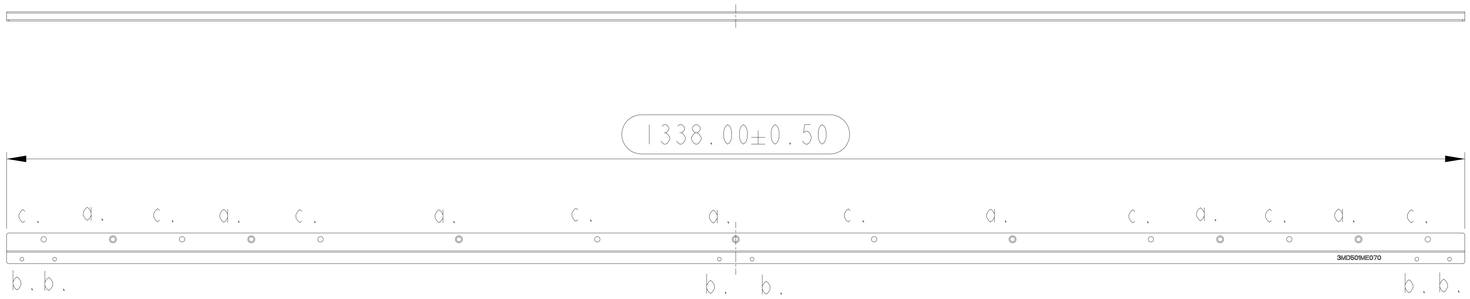



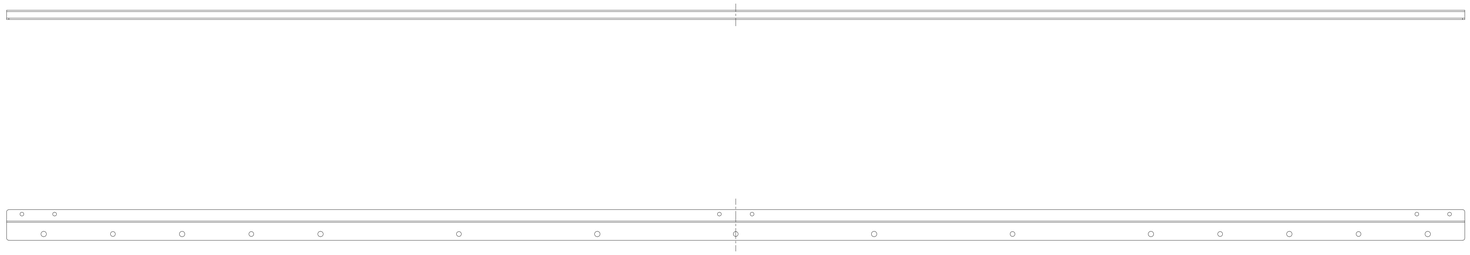

NOTES:
1. MATERIAL: SECC, t=1.2mm.
2. a.: ∅4.50 CONTERSINK HOLE(CONTERSINK ANGLE 120°)(x7).
3. b.: ∅3.50 THROUGH HOLE(x6).
4. c.: ∅5.0 THROUGH HOLE(x8).
5. ALL FLAT HEAD SCREWS(110°) MUST SINK COMPLETELY DO NOT OUTCROP.
6. IQC INSPECTION DOCUMEMNT NO.: QWI-014.

RANGE OF DIMENSION	TOLERANCE CLASS DESIGNATION f	V m	c	THIRD ANGLE PROJECTION		UNITS: mm	SCALE: 1/2	SHEET: 1 OF 1	MODEL NO.: SC65812
						MATERIAL: SECC, t=1.2	TREATMENT: DEGREASE		
UP TO 30	±0.10	±0.20	±0.50	DSGD by	Ferris Tsai	2020-05-07	PART NAME: PANEL TOP BRACKET		
ABOVE 30~120	±0.15	±0.30	±0.80	CHK by	-	-			
ABOVE 120~315	±0.20	±0.50	±1.20	APVD by	Laslie	2020.05.07 18:15:45 +08'00'	PART NO.: 3MD501ME070		REV. 0
ABOVE 315~1000	±0.30	±0.80	±2.00	APVD NO.:		3D FILE NAME:	DIVA Laboratories ,Ltd.		
ANGLE ±1° (±1.75/100)				M3238		SC65812_ASM-PANEL_TOP_BKT			