MDCP

承　认　书

Acknowledgment

客　户 CLIENT　鈺緯科技開發股份有限公司

品　名 DESCRIPTION　MODEL LABEL

料　号 PART NO　3MD600LB020(M3086)

日　期 DATE　2025-1-7

設計驗證
工程課
2025-01-13
發行
鈺緯科技開發股份有限公司

雅致印刷

苏州市雅致印刷有限公司
SUZHOU ELEGANT PRINTING CO.,LTD
地址：苏州相城区黄埭镇　邮编：215143　Add:Huangdai Town Suzhou City.
电话：(TEL)：0512-65483078 65711178　传真：(FAX)：65487645
Http://www.maidiancy.com
E-mail:maidiancy@163.com

客戶	鈺緯科技	料號	3MD600LB020 (M3086)
生產單號		品名	MODEL LABEL
交貨數量	100PCS	品檢方式	全檢


檢　驗　記　錄

項目		檢驗內容	檢驗積極/工具	判定	
外觀檢驗	1	材質確認	目視比對樣品	OK	
	2	印刷內容確認	目視比對樣品/圖紙	OK	
	3	印刷清晰度	目視比對樣品	OK	
	4	印刷顏色確認	目視比對樣品/承認書/色票	OK	
	5	表面氣泡/割傷/起皺	目視比對樣品	OK	
	6	斬型深度/毛邊/偏位/虛刀/實刀	目視比對樣品	OK	
	7	套印效果	目視比對樣品	OK	
	8	表面凸點/砂粒/摺痕/凹點	目視比對樣品	OK	
	9	表面污損/斑點/白點/溢膠	目視比對樣品	OK	
	10	表背材質/表背偏移	目視比對樣品	OK	
	11	環境管理物質不使用確認	目視比對樣品	OK	

規格	長 mm	寬 mm	R 角	C 角	跳距	分條	直徑	厚度
尺寸測量	300+/-0.2mm	20+/-0.2mm	/	/	/	/	/	/
1	300	20	/	/	/	/	/	/
2	300	20	/	/	/	/	/	/
3	300	20	/	/	/	/	/	/
4	300	20	/	/	/	/	/	/
5	300	20	/	/	/	/	/	/
備注	1.材质类型：50# PET							

主管	品檢員
孙占星	张金梅

REV.	DATE	DESCRIPTION	BY	APVD

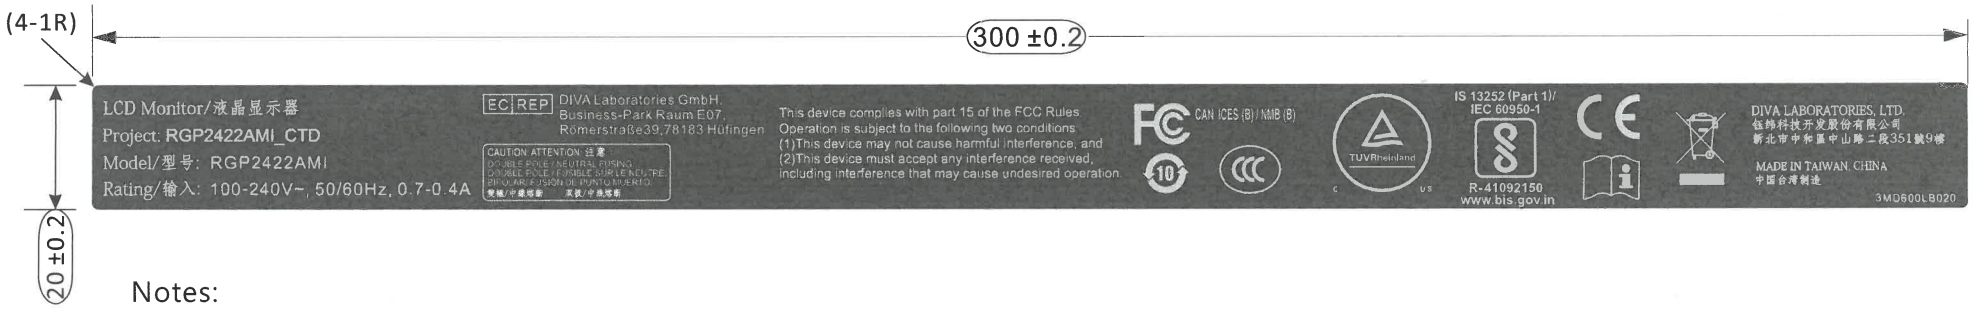

Notes:
1.Material: polyester film silver matt label (50#)
Coated: polyester film transparent label
2.Color: background: Pantone 426C
Character: Silver
3.Adhesive: acrylic adhesive
4.Material need to meet UL requirements
5.Meet UL second printing standard.Only use PGJI2 MH46084 printed label: SuZhou Elegant Printing, type: MD003-028B
6.材質+背膠總厚度t=0.1mm±0.05mm
7.顏色、尺寸參照承認樣品
8.IQC inspection document : QWI-016

設計驗證
工程課
2025-01-13
發行
鈺緯科技開發股份有限公司

PM/SALES	ENG.DEPT	SAFETY
0110	Nick_Lin	0110 1200


RANGE OF DIMENSION	TOLERANCE CLASS DESIGNATION		
	f	V m	c
UP TO 30	±0.10	±0.20	±0.50
ABOVE 30~120	±0.15	±0.30	±0.80
ABOVE 120~315	±0.20	±0.50	±1.20
ABOVE 315~1000	±0.30	±0.80	±2.00
ANGLE±1° (±1.75/100)			

THIRD ANGLE PROJECTION	UNITS: mm	SCALE: 1/1	SHEET: 1/1	MODEL NO.:RGP2422AMI_CTD
	MATERIAL:		TREATMENT:	
DSGD by	COCO	2025/01/08	PART NAME: MODEL LABEL	
APVD by		2025/01/10	PART NO.: 3MD600LB020	VER. 0
APVD NO.: (M3086)	FILE NAME: RGP2422AMI_CTD.cdr	DIVA Laboratories ,Ltd.		

溧阳金利宝胶粘制品有限公司 **《产品说明书》**

KINGLABEL ADHESIVE PRODUCTS CO.,LTD (LIYANG)

产品编号： 3339J

品　　名 Article Name	50 番压花表面处理银色雾面特多龙商标纸(不变色)	英文品名 English Name	50μ Top-coated Polyester Film Silver Matt(I) Label With Depressive Liner
代　号 Code	HTLSMI50(EB)J	特殊定制单编号 Special Order No.	~
产品结构 Structure	 面材 Face Stock 胶水 Adhesive 底纸 Liner		
面　材 Face Stock	聚酯膜 Polyester Film	底　纸 Liner	PE 淋膜格拉辛压花离型纸 Depressive PE Lami. Glassine Release Paper
厚度 (mm) Thickness	0.054±0.005	厚度 (mm) Thickness	0.100±0.011
基重 (g/m^2) Basic Weight	70±5	基重 (g/m^2) Basic Weight	100±10
颜色 Color	银色雾面 Silver Matt	颜色 Color	白色 White
~	~	剥离力(g/in) Release Force	20±10
~	~	压花深度(mm) Depressive Depth	0.010~0.020
粘　胶 Adhesive			
测试项目 Properties	标准值 Value	单位 Unit	测试方法 Test Method
上胶厚度 Thickness	0.033±0.003	mm	KLS-01
上胶量 Dry Coating Weight	26±3	g/m^2	KLS-02
加热减量 Solvent Retention	1.5↓	WT%	KLS-12
镜钢粘着力 Adhesion to Mirror Steel	0.8↑	kg/inch	~~
初期力 Initial Tack	1↑	#	GB/T 4852
保持力 Holding Power	1↑	$hr/kg \times inch^2$	GB/T 4851
适用温度 Service Temperature	5~125	℃	~~
最低贴标温度 Min. Operative Temperature	5	℃	~~
储存条件 Condition	储存条件为常温范围，阴凉通风干燥场所（0~28℃，70％RH 以下），避免高温高湿,不可日晒雨淋。最佳储存条件为 23±5℃，65±5％RH，保质期限为 12 个月。（注: 产品长期放在温度和湿度皆过高或过低之下，会导致保质期限明显缩短。）		
备注 Remark	本公司产品的品质管制，系针对我司产品说明书上所列之产品规范进行检验和管制，在实际应用时会有差异性，请客户使用前务必先行了解目的与使用条件及要求，进行测试确认无虞时，再使用。除非明确约定，本公司不承担本材料以外的损失费用。		
修订日期	8/4/2020	修订次数	第 1 次

溧阳金利宝胶粘制品有限公司 文書專用章 Tel:0519-87962988

Suzhou Elegant Printing Co Ltd

No.6 Chunwang Road, Huangdai Town, Xiangcheng District, Suzhou Jiangsu 215143 CN

unprinted stock dsg: MD003-028B - printed stock dsg: MD003-028B

Pressure-sensitive systems

Suitable for additional printing with one or more of the following inks (in the black color unless otherwise indicated):

Thermal transfer ribbon

Ricoh B110A (suitable on overlamination only), B110C, B110CB, B110CR, B110CW, B110CX

Sony Chemicals 3370 (White, suitable on overlamination only)

Application Surface	Max Temp (°C)	Min Temp (°C)	Indoor Use	Outdoor Use	Additional Conditions
Acrylonitrile butadiene styrene	100	-40	Yes	No	-
Aluminum	100	-40	Yes	No	-
Polycarbonate	100	-40	Yes	No	-
Galvanized steel	80	-40	Yes	No	-
Stainless steel	80	-40	Yes	No	-

Suitable for additional printing with one or more of the following inks in Canadian applications (in the black color unless otherwise indicated):

Thermal transfer ribbon

Ricoh B110A (suitable on overlamination only), B110C, B110CB, B110CR, B110CW, B110CX

Sony Chemicals 3370 (White, suitable on overlamination only)

Canadian Application Surface	Max Temp (°C)	Indoor Use	Outdoor Use	Additional Conditions
Metals - bare, plated, painted or enameled steel or aluminum	100	Yes	No	-
Plastic Group III - polycarbonate, acetate, acrylic	100	Yes	No	-
Plastic Group VI - polystyrene, styrene acrylonitrile, acrylonitrile-butadiene-styrene	100	Yes	No	-

Report Date: 2008-06-28
Last Revised: 2019-11-11

© 2025 UL Solutions