
REV.	DATE	DESCRIPTION	BY	APVD
A	2025.7.2	REVISE TWO OBLONG HOLES DIMENSION P/N CHANGE FROM 3MD539ME030 TO 3MD539ME03A	JOSEPH	

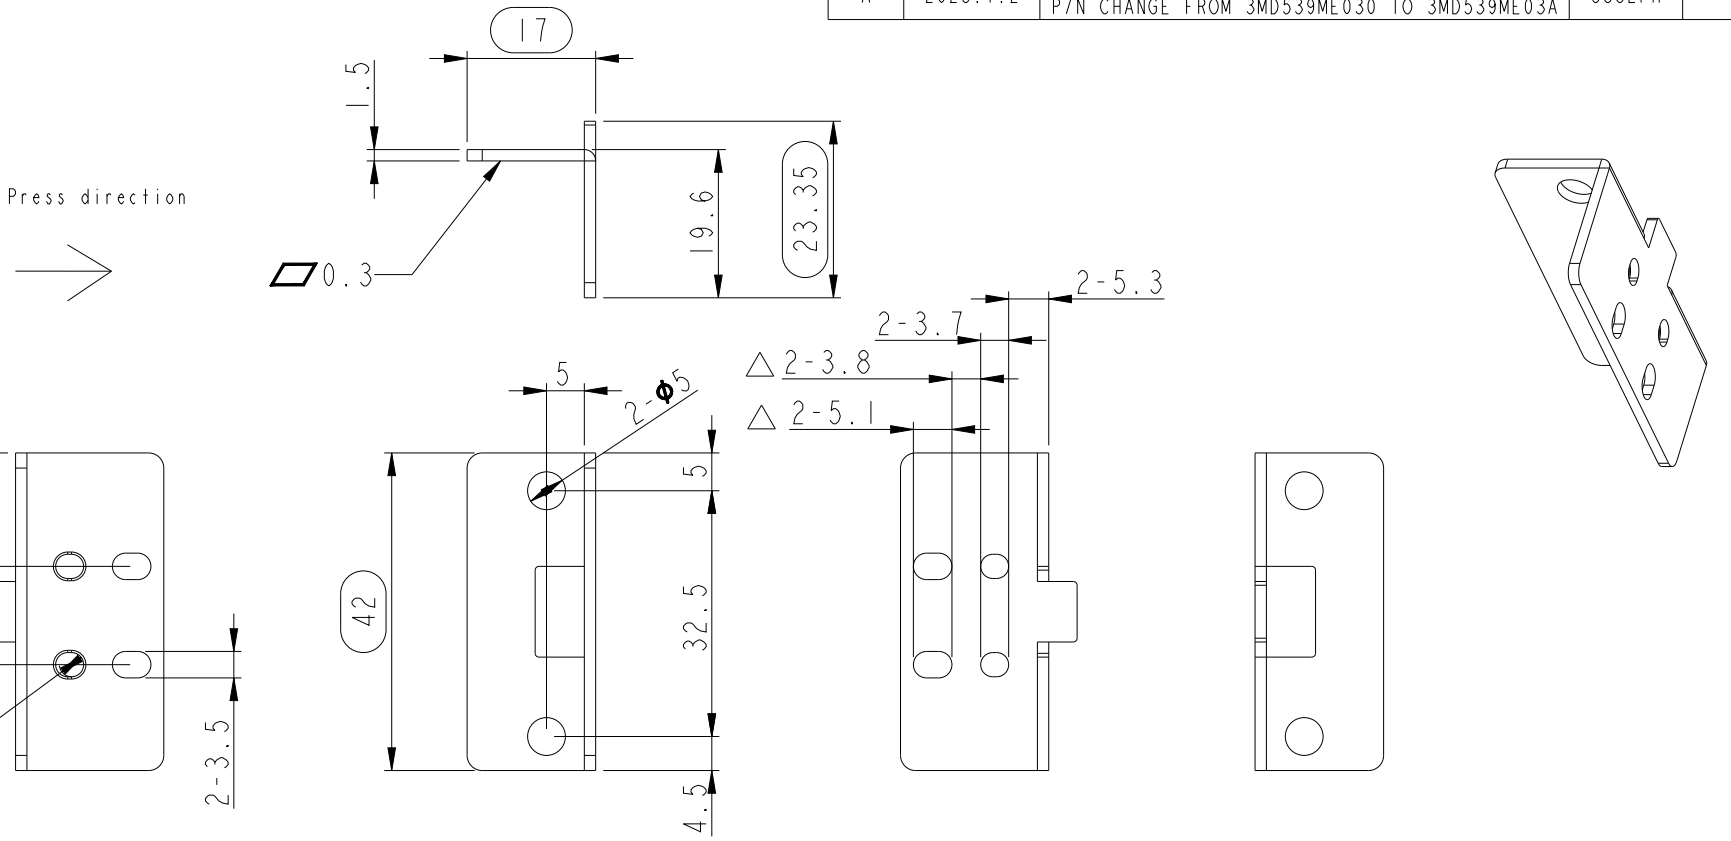

Note:
1. ⬭ Inspection dimension.
2. Plating:N/A
3. Painting:N/A
4. Burrs & sharp edge(s) allowed in 0.1mm max, based on the principle of not hurtting hands.
5. Deformation and flatness Distortion <0.3MM
6. Unspecified Dimension refer to CAD Drawing file.
7. Burry Hole:Torque >=6kgf/cm
   Stand Off/ NUT :Pull sterength >=20kgf ;Torque >=6kgf/cm.
8. IQC Inspection Document NO.:QWI-014
9. No oil , Scratch , Water marks ...cosmetic defect on surface.
10. RoHS Compliant

RANGE OF DIMENSION	TOLERANCE CLASS DESIGNATION V f	V m	V c
UP TO 30	±0.10	±0.20	±0.50
ABOVE 30~120	±0.15	±0.30	±0.80
ABOVE 120~315	±0.20	±0.50	±1.20
ABOVE 315~1000	±0.30	±0.80	±2.00
ANGLE ±1° (±1.75/100)			

THIRD ANGLE PROJECTION

UNITS:mm | SCALE: 1/1 | SHEET: 1 OF 1 | MODEL NO.: 24" Epiq Premium

MATERIAL: AL5052 1.5t | TREATMENT: Conductive chromate conversion coat

DSGD by	Kate Chiang	2019.10.30
CHK by		
APVD by		
APVD NO.:	3D FILE NAME: 24_14601_LCD_SUP_BRACKET	

PART NAME: LCD SUP BRACKET (24" EPIQ)

PART NO.: 3MD539ME03A | REV. A

DIVA Laboratories ,Ltd.