


模具编号	
HDMI A(M)外模	N02007-B
HDMI A(M)内模	N02088L

不含TOTM

版本	变更内容	变更单号	负责人	日期

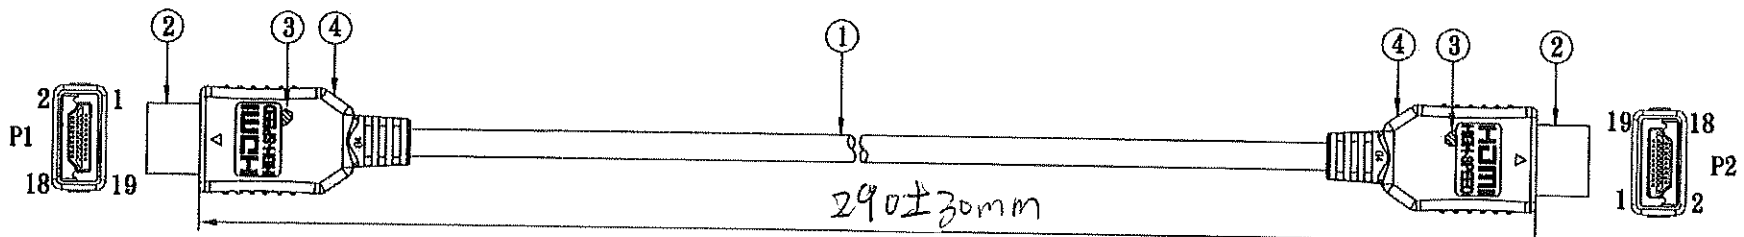





线位表				
P1	芯线颜色		P2	铝箔颜色
5	地线		5	红色铝箔
1	蓝色		1	
3	白色		3	
2	地线		2	棕色铝箔
4	蓝色		4	
6	白色		6	
11	地线		11	绿色铝箔
7	蓝色		7	
9	白色		9	
8	地线		8	蓝色铝箔
10	蓝色		10	
12	白色		12	
17	地线		17	黄色铝箔
14	蓝色		14	
19	白色		19	
13	棕色		13	
15	黑色		15	
16	橙色		16	
18	白色		18	
铁壳	编织/地线		铁壳	

△2

MARK "* *"
- 用1~N表示同一模具第几穴
- 用A~Z表示同一模具编号第几套模具

注：
1. 短路/断路：100% 测试
2. 耐压：AC 300V 0.1S 漏电流2mA（最大）
3. 绝缘阻抗：DC 150V 0.1S 10MΩ（最小）
4. 导通电阻：5Ω(最大)
5. 本产品符合"鸿硕WI-G43-Q-Q-003环保相关物质技术标准最新版本"要求
6. 线材印字内容：

G4：E246588 ㄖㄐ AWM STYLE 20276 80℃ 30V VW-1 Hotron High Speed HDMI™ Cable With Ethernet

H1：E525041 ㄖㄐ AWM STYLE 20276 80℃ 30V VW-1 Hotron High Speed HDMI™ Cable With Ethernet

序号	品名	规格	数量	单位
④	外模	PVC 黑色	2	PCS
③	内模	PE料（无卤）国产料	3.43	G
②	连接器	HDMI A TYPE 19PIN公头(含主体+上下铁壳+排线夹) 高频焊	2	SET
①	线材	UL20276 ((32#*1P+EAHM)*5+32#*4C) 罩+AEB(AL) 85% CABLE COLOR BLACK OD5.2 △1 △2	1.835	M

PROPRIETARY NOTE:
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF HOTRON PRECISION ELECTRONIC INDUSTRIAL CO.,LTD

核准：
审核：
制图：张江龙
单位：mm [INCH]

鸿硕精密電工股份有限公司
HOTRON PRECISION ELECTRONIC INDUSTRIAL CO., LTD

品名： HDMI A(M) TO HDMI A(M) CABLE L=290mm (V2.0)
客户料号：
鸿硕料号：

页码： 1 OF 3 版本：0.2

HB5801-230600U1(UL05004RAY)