REV.	ECN NO.	REVISIONS	REV.DRAWN	DATE
A		初版发行	CARRY	2009/09/16
B		更正标注	sunquan	2012/05/04
C		更正料号	sunquan	2015/03/20
D		修正DIP脚长	YangSong	2015/10/12
E		修改尺寸	YangSong	2018/09/21
F		修改C尺寸	Sunhan	2019/01/18

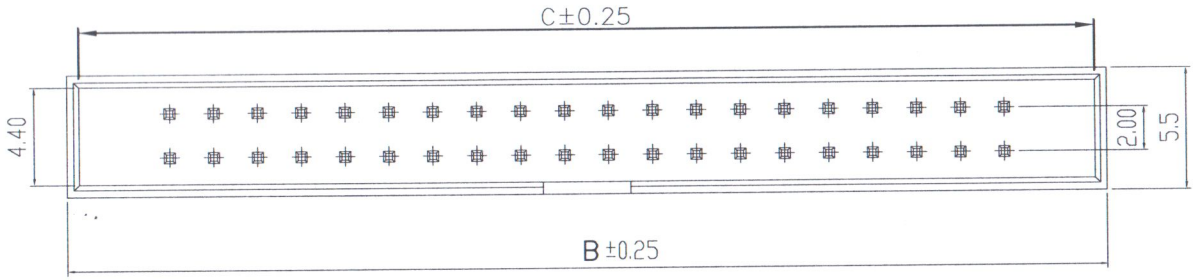

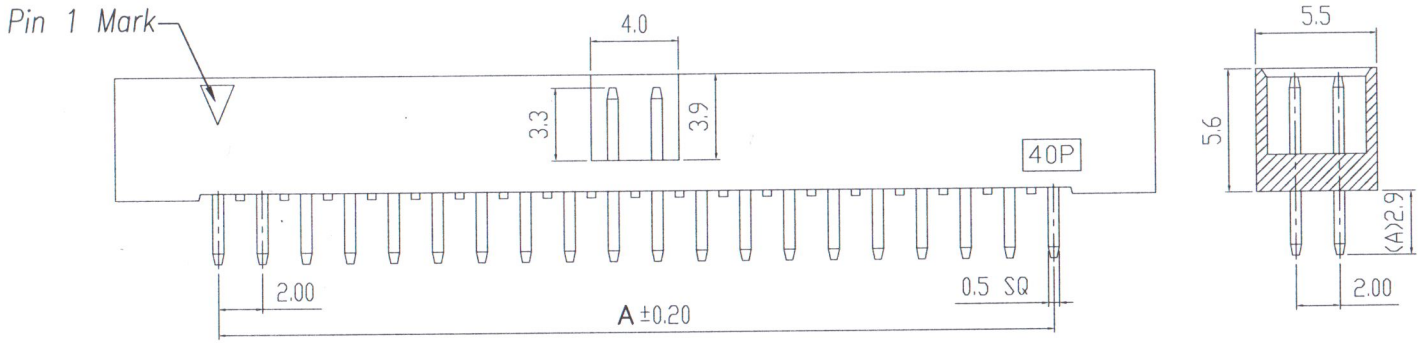

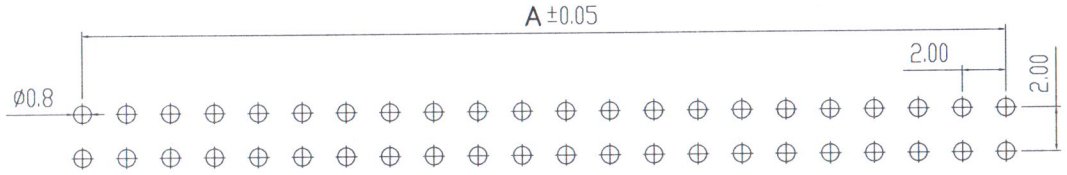

Recommended P. C. B LaYout

SPECIFICATIONS
- Current Rating:1.5AMP
- Withstanding Voltage:500V AC/minute
- Insulation Resistance:1,000MΩ
- Temperature Range:−40°C to +105°C
- Contact Resistance:20mΩ max

FEATURES:
- Part No.:JS−1300−XX
- Poles:08,10,12...64
- Material: Contact:Copper,Gold Plated
  Base:PA6T UL94V−0

中图 2019.01.18 工程部

POLES	A	B	C	POLES	A	B	C
8	6.00	15.34	14.24	38	36.00	45.34	44.24
10	8.00	17.34	16.24	40	38.00	47.34	46.24
12	10.00	19.34	18.24	42	40.00	49.34	48.24
14	12.00	21.34	20.24	44	42.00	51.34	50.24
16	14.00	23.34	22.24	46	44.00	53.34	52.24
18	16.00	25.34	24.24	48	46.00	55.34	54.24
20	18.00	27.34	26.24	50	48.00	57.34	56.24
22	20.00	29.34	28.24	52	50.00	59.34	58.24
24	22.00	31.34	30.24	54	52.00	61.34	60.24
26	24.00	33.34	32.24	56	54.00	63.34	62.24
28	26.00	35.34	34.24	58	56.00	65.34	64.24
30	28.00	37.34	36.24	60	58.00	67.34	66.24
32	30.00	39.34	38.24	62	60.00	69.34	68.24
34	32.00	41.34	40.24	64	62.00	71.34	70.24
36	34.00	43.34	42.24				

X. ± 0.40	X.° ± 5.°
.X ± 0.30	.X° ± 2°
.XX ± 0.20	.XX° ± 1°
.XXX± 0.10	.XXX°± ---

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CHYAO SHIUNN ELECTRONIC CO., LTD. AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF CHYAO SHIUNN ELECTRONIC CO., LTD.

UNITS: mm
MATERIAL: SEE NOTE
FINISH: SEE NOTE
Q'TY: SEE NOTE

NAME(INTENDED USE): Customer
PART NO.(INTENDED USE): JS−1300−XX
APPD: G.T. Zeng
CHKD: 2019/01/18
DR: CARRY 2009/09/16

CHYAO SHIUNN ELECTRONIC (SHANGHAI) CO.,LTD.
TITLE: 2.0*5.7 BOX XXP S/T
DWG NO.: 010−XXXX−1300−XX

SCALE	SHEET	REV.
4:1	1/1	F

符合环境管理物质