
P/N	REV	SYMBOL	DESCRIPTION	LOCATED	REASON	SIGN	DATE
4G.2AK02.001	A		FIRST RELEASE		/	DAVID DW LIU	2013/10/24

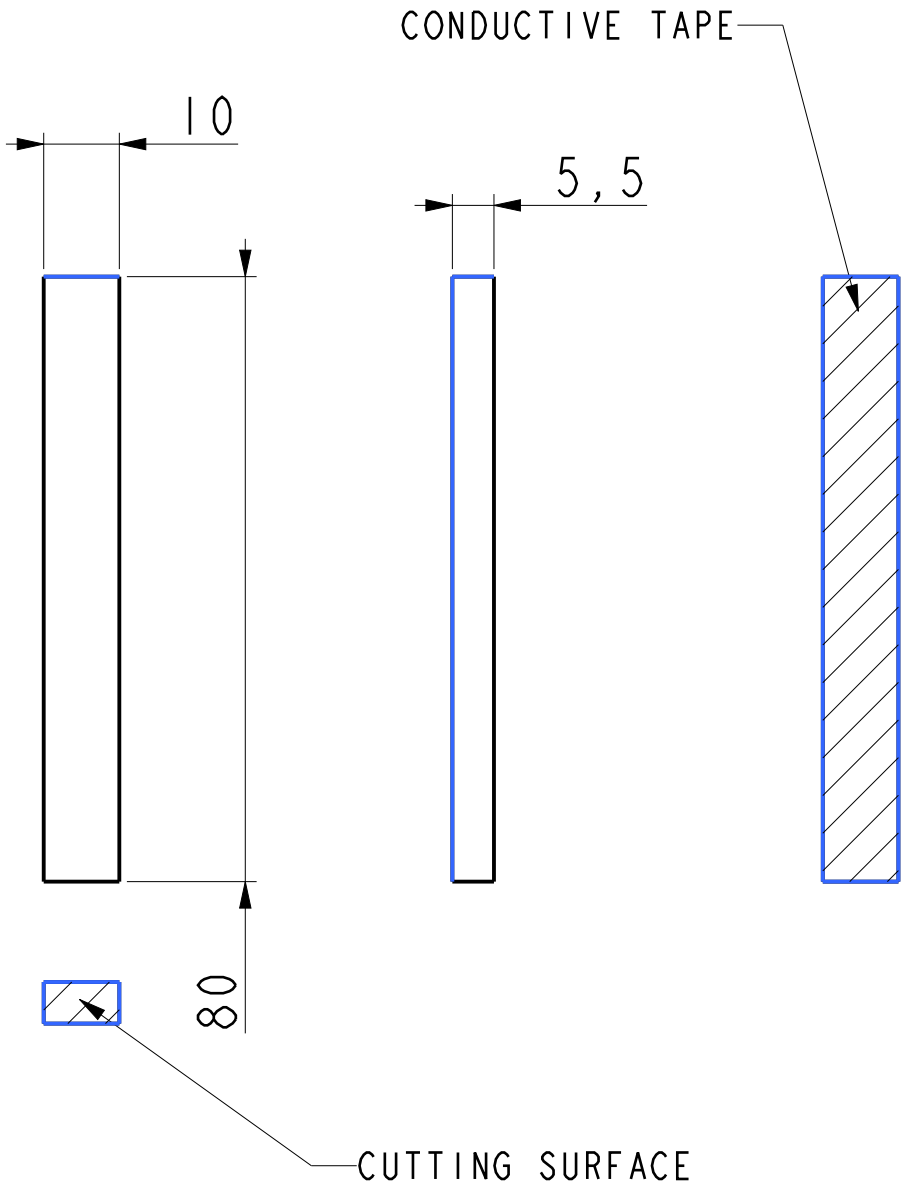

NOTES:
1. MATERIAL: POLYURETHANE FOAM & CONDUCTIVE FABRIC
2. CONDUCT RESISTANCE BETWEEN CONDUCTIVE ADHESIVE & CONDUCTIVE FABRIC MUST BELOW 20Ω
3. PART IS TO BE FREE OF OIL AND CONTAMINATION
4. TOLERANCE CLASS: D

MODEL	EP17TF4		NAME	GASKET L80*W10*H5.5 EP17TF4		
DRN	DAVID DW LIU	2013/10/24	MATERIAL	POLYURETHANE FOAM & CONDUCTIVE FABRIC		
DSN	DAVID DW LIU	2013/10/24	FINISH	/		
CKD	/	/	SCALE	1:1	DIM IN	mm
APPD	MARK PENG	2013/10/24	SHEET	1 OF 1	CAVITIES	1

Qisda Corporation

TOLERANCE UNLESS OTHERWISE SPECIFIED (±)							
CLASS	A	B	C	D	E	F	G
< 8mm	0.05	0.1	0.1	0.2	0.2	0.4	0.4
8 ~ 25mm	0.08	0.15	0.15	0.3	0.3	0.6	0.6
25 ~ 80mm	0.12	0.2	0.25	0.4	0.5	0.8	1.0
80 ~ 250mm	0.25	0.3	0.4	0.6	0.8	1.2	1.5
250 ~ 800mm	0.5	0.6	0.8	1.0	1.5	2.0	3.0
> 800mm	1.0	1.0	1.5	1.7	3.0	4.0	6.0
ANGLE	0.5						
FILE NAME	GASKET L80*W10*H5.5 EP17TF4						
PART NO.	4G.2AK02.001						

成 品 包 装 方 式

客户名称： 佳世达　　制定日期： 2015.09.18

供 应 商： 苏州永硕电子有限公司　　修订日期：

料　　号： 4G.2AK02.001　　制　　作： 何芳芳

材　　质： POLYURETHANE FOAM & CONDUCTIVE FABRIC　　审　　核： 茅俊骥

（1）数量： 400 个/箱（内含：4包/ 箱* 100pcs/包 20PCS/张）


（2）运输方式：1.路运 （ ■ ） 2.空运 （ ） 3.海运 （ ） 4.其他 （ ）

（3）产品发送所在地：苏州相城经济开发区康元路883号

（4）外形尺寸及形态

材质：外装箱（ 挖楞纸 ）

内装箱（ 无 ）



(80) mm

(180) mm

（5）包装要领

1、袋入（ ） 2、纸包（ ） 3、裸（ ） 4 、其他(塑料薄膜)

（6）纸箱处理: 1、返还（ ） 2、不返还（ ■ ）

（7）如果有其他事项请填写