DIVA displays better.

SUBJECT: **EMI Test for RUH2773AMII**

Customer Name:	OLORIN	Model Name:	RUH2773AMII
Sample Phase:	PVT	New Parts Approval	☑ Yes ☐ No
PM Approve	Sharon	EE Approve	Ben
ME Approve	Owen	Tech. Reviewer:	Rongchi
Measurement Condition			
Test Laboratory	SUD	Test site	966 chamber
Test Rule	CE	Frequency Range	30 ~1000MHz
Test Mode	DP mode	Test Result	☑ PASS ☐ Fail
Resolution:	3840*2160/ 60 Hz	Pattern:	COLOR BAR
Test PC	DIVA_ pc NVIDIA 1060TI	Test peripheral	N/A
Key Component list:			
Main Board:	2AAD606R038 3PD606F0110	Power Board:	DELTA, 24V2.71A MEA-065A24C
Scalar :	RTD2795	driver Board:	2AAD606R03Q
PCB layers	4	Firmware ver.:	MCD27102_251209R0V01
Panel No.	AUO 27" G270ZAN01.504	Cable	DP 1.8m cable HDMI 1.8m cable*2

Test Summary

New Panel(G270ZAN01.504)


	EMI Class B
RUH2773AMII	Pass, -6.74 dB

Issuer: Eric	Date: 2026/07/17

DIVA displays better.

2. Test Setup:




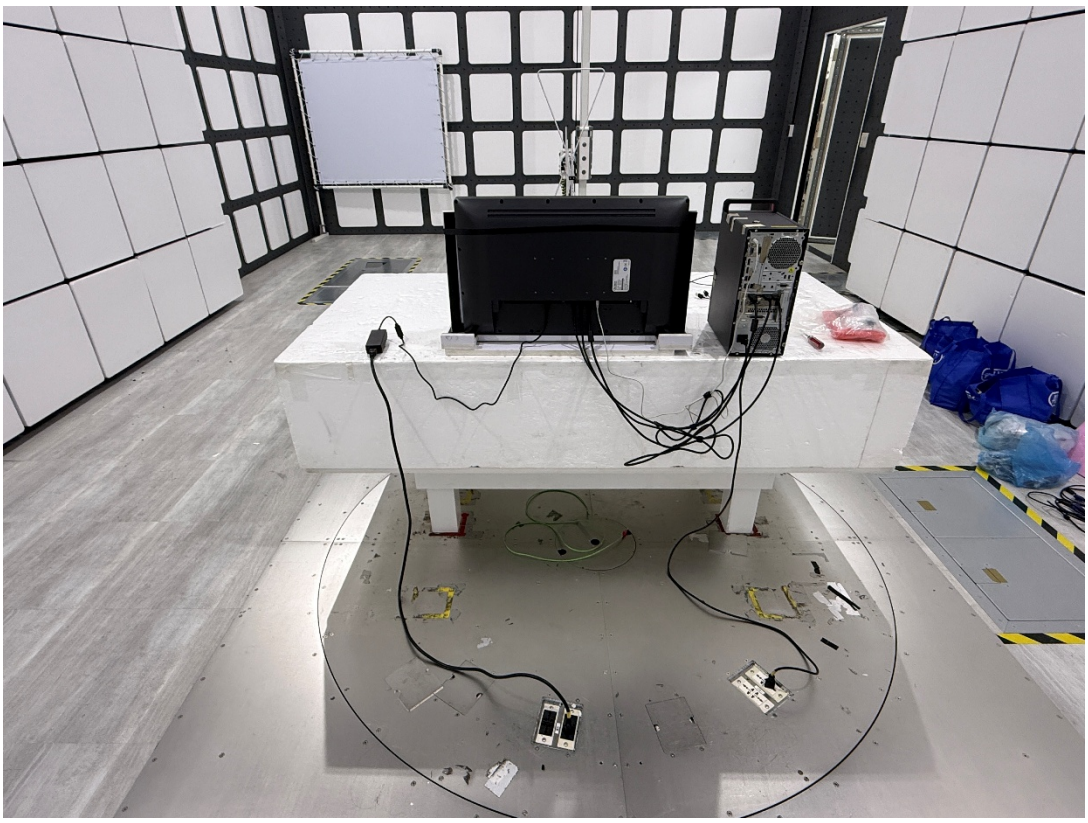

displays better.

3. Test Data：


TÜV SÜD Asia Ltd. Taiwan Branch
No. 31,Dinghu Rd.,Guishan Dist.,
Taoyuan City 333008,Taiwan(R.O.C.)

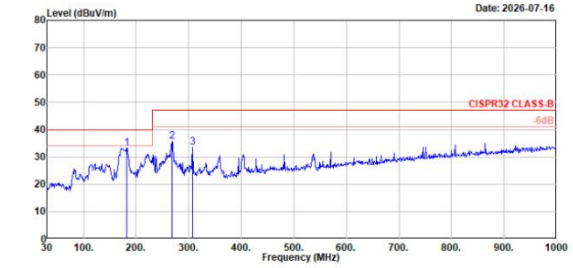

Site : CHAMBER A
Condition : CISPR32 CLASS-B Horizontal
Engineer : Ben Wang
Ambinet : 23.9C 73%
:
Applicant : Diva
Product Name: Monitor
Model No : RUH2773AMII(MCD27102)
Power : 230V,50Hz
Test Mode : 3840*2160 60Hz, COLOR BAR, DP+HDMI 2
Note : Panel(G270ZAN01.504)

	Freq	Read Level	Level	Factor	Limit Line	APos	TPos	Over Limit	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	cm	deg	dB	
1	181.320	46.44	33.12	-13.32	40.00	200	136	-6.88	Peak
2	267.650	47.66	35.58	-12.08	47.00	100	99	-11.42	Peak
3	307.420	44.26	33.43	-10.83	47.00	100	52	-13.57	Peak

TÜV SÜD Asia Ltd. Taiwan Branch
No. 31,Dinghu Rd.,Guishan Dist.,
Taoyuan City 333008,Taiwan(R.O.C.)

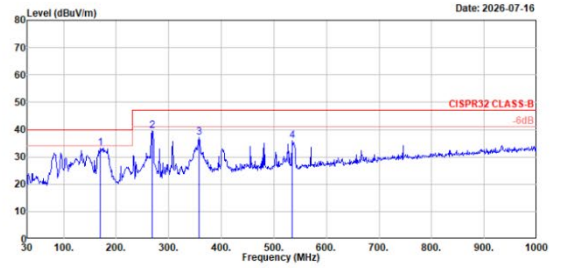

Site : CHAMBER A
Condition : CISPR32 CLASS-B Vertical
Engineer : Ben Wang
Ambinet : 23.9C 73%
:
Applicant : Diva
Product Name: Monitor
Model No : RUH2773AMII(MCD27102)
Power : 230V,50Hz
Test Mode : 3840*2160 60Hz, COLOR BAR, DP+HDMI 2
Note : Panel(G270ZAN01.504)

	Freq	Read Level	Level	Factor	Limit Line	APos	TPos	Over Limit	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	cm	deg	dB	
1	169.680	45.35	33.26	-12.09	40.00	100	0	-6.74	Peak
2	268.620	51.54	39.51	-12.03	47.00	200	18	-7.49	Peak
3	356.890	46.85	37.18	-9.67	47.00	200	0	-9.82	Peak
4	534.400	41.28	35.85	-5.43	47.00	154	0	-11.15	Peak

END